


LORO-DOPPELR.ATT.ABL.HAUPT-NOT-KOMBI M.B

LORO double pipe parapet drain main-emergency-combi with basin low-laid pipe with adhesive flange for bitumen DN 100

Opis

LORO-X main-emergency combination direct parapet drain with double pipe, series 43 with basin and lowered pipe, with gravity flow, discharge rate main drainage 4.0 l/s at 35 mm water level on the roof and emergency drainage 4.0 l/s at 75 mm, with bonding flange, for bituminous roofing sheets, roof penetration depth 103 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX727, made of steel, hot-dip galvanized, DN100/100




Podaci o artiklu

EAN kod	4038088090770
ETIM klasa	EC010400
Nazivni promjer	DN 100
Vanjske mjere (VxŠxD)	480 x 719 x 338 mm
Težina	10,70 Kg (STK)
Grupa proizvoda	9
Carinski tarifni broj	73089098
Materijal / Boja	Stahl feuerverzinkt, Silber

Napomena za upotrebu

Für Wohngebäude bietet LORO ein Silent System mit Haupt- und Notentwässerung als Silent-Freisiegelströmung. Die Hauptentwässerung erfolgt hierbei ebenfalls mit 4,5l/s in die Grundleitung - die Notentwässerung läuft als Speierlösung jedoch direkt über das Überlaufwehr des Sammelkastens.

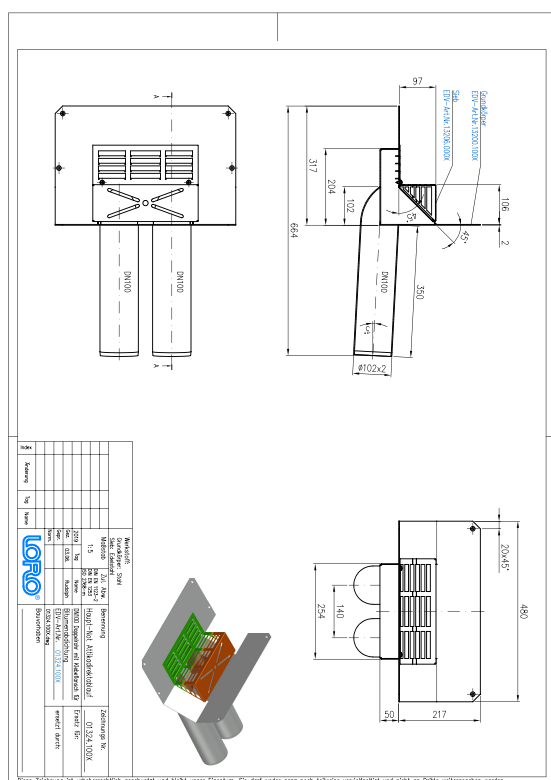

Preuzimanja



Alles online

[Upute za ugradnju \(PDF\)](#)

[Certifikat \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Dimenzijski crtež \(PDF\)](#)

[Tehnički list sustava LX 727](#)

[BIM 3D \(STEP\)](#)

[Prospekt \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)