Scheda tecnica del prodotto

LORO_Produkt-Datenblatt_01324.100X_it.pdf
Articolo 01324.100X
29.11.2026, 20:41


LORO-DOPPELR.ATT.ABL.HAUPT-NOT-KOMBI M.B

LORO double pipe parapet drain main-emergency-combi with basin low-laid pipe with adhesive flange for bitumen DN 100

Voce di capitolato

LORO-X main-emergency combination direct parapet drain with double pipe, series 43 with basin and lowered pipe, with gravity flow, discharge rate main drainage 4.0 l/s at 35 mm water level on the roof and emergency drainage 4.0 l/s at 75 mm, with bonding flange, for bituminous roofing sheets, roof penetration depth 103 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX727, made of steel, hot-dip galvanized, DN100/100



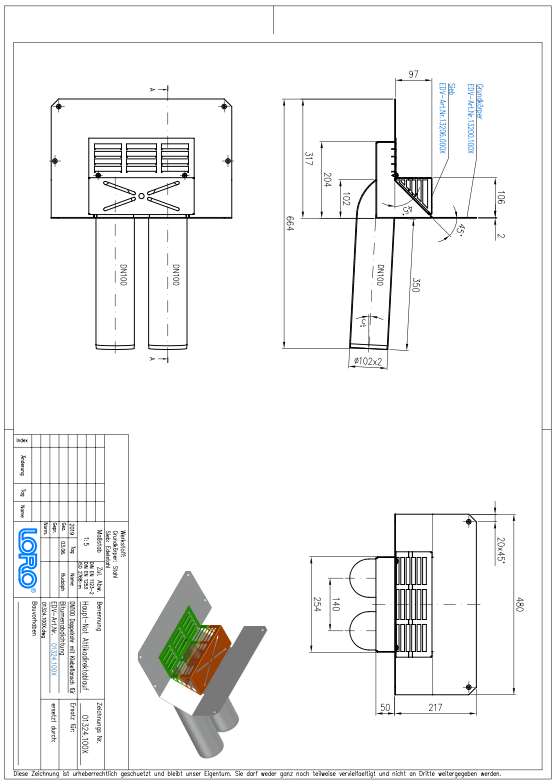

Dati articolo

Codice EAN	**4038088090770**
Classe ETIM	**EC010400**
Diametro nominale	**DN 100**
Misure esterne (AxLxP)	**480 x 719 x 338 mm**
Peso	**10,70 Kg (STK)**
Gruppo prodotti	**9**
Numero tariffa doganale	**73089098**
Materiale / Colore	**Stahl feuerverzinkt, Silber**

Note d'uso

Für Wohngebäude bietet LORO ein Silent System mit Haupt- und Notentwässerung als Silent-Freispiegelströmung. Die Hauptentwässerung erfolgt hierbei ebenfalls mit 4,5l/s in die Grundleitung - die Notentwässerung läuft als Speierlösung jedoch direkt über das Überlaufwehr des Sammelkastens.

Download

Alles online

Istruzioni di installazione (PDF)
Disegno dimensionale (PDF)
Brochure (PDF)
Certificato (PDF)
Scheda tecnica del sistema LX 727
CAD 2D (DXF)
CAD 3D (DWG)
BIM 3D (STEP)
BIM 3D (IFC)