LORO-DOPPELR.ATT.ABL.HAUPT-NOT-KOMBI M.B

LORO double pipe parapet drain main-emergency-combi with basin low-laid pipe with adhesive flange for bitumen DN 100

Beskrivelsestekst

LORO-X main-emergency combination direct parapet drain with double pipe, series 43 with basin and lowered pipe, with gravity flow, discharge rate main drainage 4.0 l/s at 35 mm water level on the roof and emergency drainage 4.0 l/s at 75 mm, with bonding flange, for bituminous roofing sheets, roof penetration depth 103 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX727, made of steel, hot-dip galvanized, DN100/100



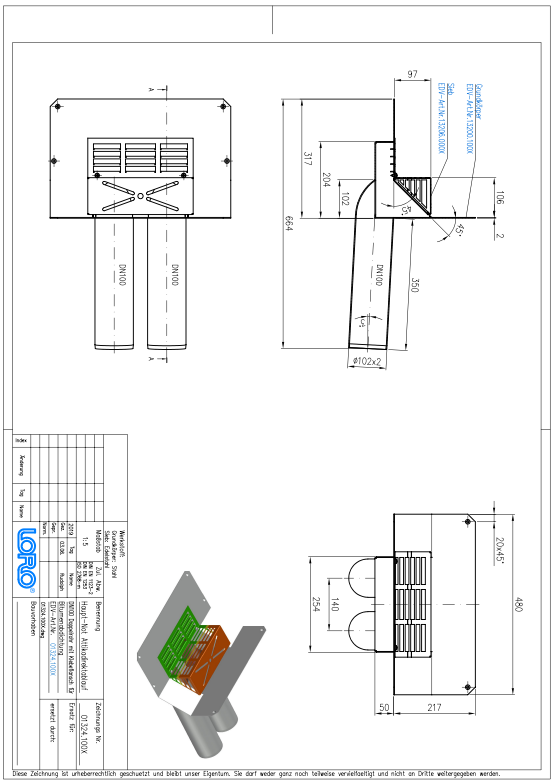

Artikkeldata

EAN-kode	**4038088090770**
ETIM-klasse	**EC010400**
Nominell diameter	**DN 100**
Utvendige mål (HxBxL)	**480 x 719 x 338 mm**
Vekt	**10,70 Kg (STK)**
Produktgruppe	**9**
Tolltariffnummer	**73089098**
Materiale / Farge	**Stahl feuerverzinkt, Silber**

Bruksanvisning

Für Wohngebäude bietet LORO ein Silent System mit Haupt- und Notentwässerung als Silent-Freispiegelströmung. Die Hauptentwässerung erfolgt hierbei ebenfalls mit 4,5l/s in die Grundleitung - die Notentwässerung läuft als Speierlösung jedoch direkt über das Überlaufwehr des Sammelkastens.

Nedlastinger

Alles online

Monteringsanvisning (PDF)
Godkjenning (PDF)
CAD 3D (DWG)
Måltegning (PDF)
Systemdatablad LX 727
BIM 3D (STEP)
Brosjyre (PDF)
CAD 2D (DXF)
BIM 3D (IFC)