
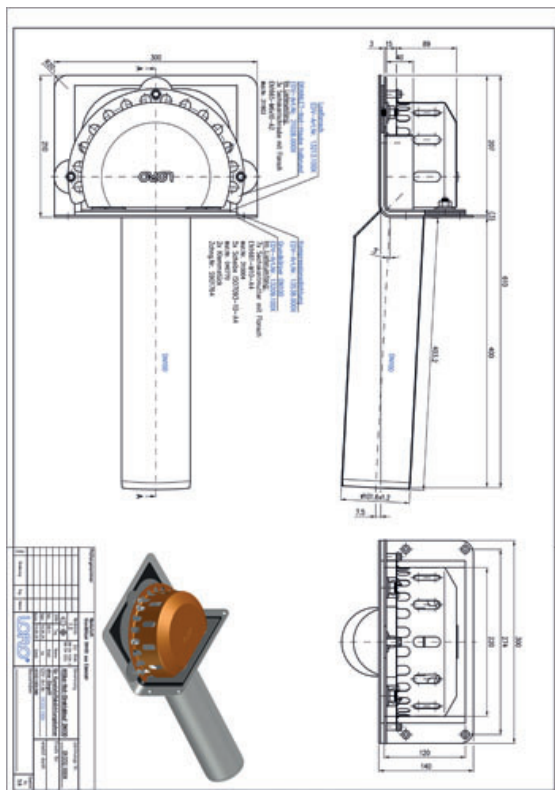


LORO-ATTIKA NOT-ABL.M.HALBRUNDER HAUBE,

LORO-Attika emergency drain with semi-circular cover Clamping flange for PVC foil for free-standing installation

Description

LORO-X direct parapet drain, series 43 without penetration into the roof, for main drainage with gravity flow, discharge rate 3.1 l/s at 75 mm water level on the roof, with clamping flange, as loose and fixed flange construction, for plastic roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2m ventilated downpipe according to system data sheet LX1889, made of stainless steel, DN100

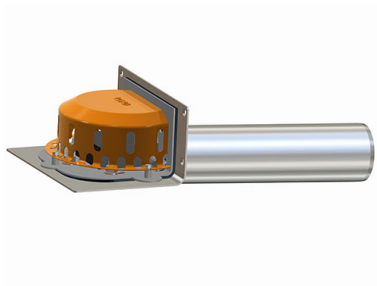

Article information

EAN Code	4038088100486
ETIM Class	EC010400
Nominal diameter	DN 100
Outside measurements (HxWxL)	195 x 613 x 300 mm
Weight	5,60 Kg (STK)
Product group	9
Customs tariff number	73072980
Material / Color	Edelstahl, Silber

Usage note

kein Verwendungshinweis notwendig

Downloads



Alles online

[CAD drawing \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Certificate \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[System data sheet LX 1889](#)

[BIM 3D \(STEP\)](#)