


## LORO-ATTIKA NOT-ABL.M.HALBRUNDER HAUBE,

LORO-Attika emergency drain with semi-circular cover Clamping flange for PVC foil for free-standing installation

### Kuvaus

LORO-X direct parapet drain, series 43 without penetration into the roof, for main drainage with gravity flow, discharge rate 3.1 l/s at 75 mm water level on the roof, with clamping flange, as loose and fixed flange construction, for plastic roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2m ventilated downpipe according to system data sheet LX1889, made of stainless steel, DN100

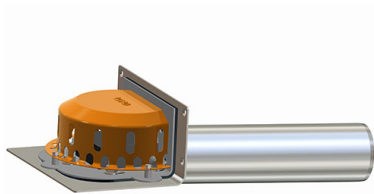


### Tuotetiedot

|                      |                    |
|----------------------|--------------------|
| EAN-koodi            | 4038088100486      |
| ETIM-luokka          | EC010400           |
| Nimellishalkaisija   | DN 100             |
| Ulkomitat (KxLxS)    | 195 x 613 x 300 mm |
| Paino                | 5,60 Kg (STK)      |
| Tuoteryhmä           | 9                  |
| Tullitariffin numero | 73072980           |
| Materiaali / Väri    | Edelstahl, Silber  |

### Käyttöohje

kein Verwendungshinweis notwendig

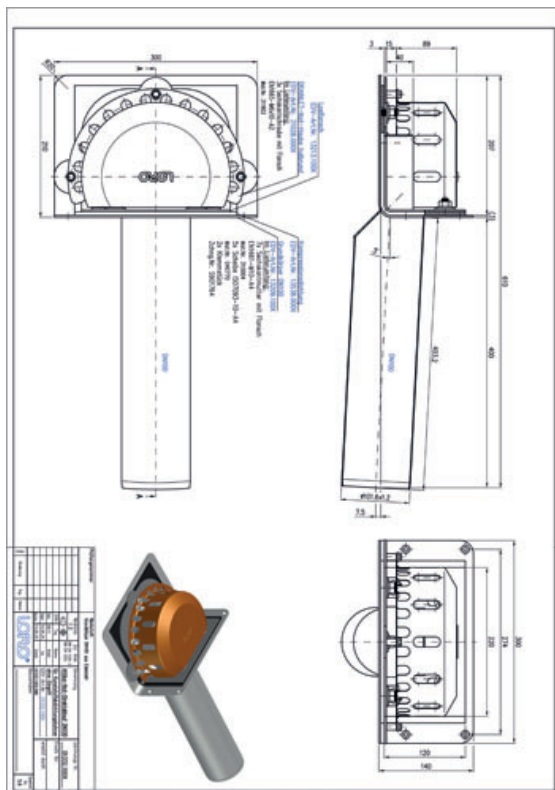

### Lataukset



Alles online

[Mittapiirustus \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Hyväksyntä \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Järjestelmän datalehti LX 1889](#)

[BIM 3D \(STEP\)](#)