

LX ATTIKA NOT.-ABLAUF,ET:55MM,O.AUFK.

LORO-X Emergency Drain Entry depth 55 mm without upstand Weir height 55 mm Pressure support Clamping flange DN 70

Descriere

LORO-X RAINSTAR siphonic parapet drain, series 89 with low penetration depth, Distant flat version without upstand, for emergency drainage with siphonic flow, discharge rate 17.7 l/s at 75 mm water level on the roof, with clamping flange, as loose and fixed flange construction, without upstand for bituminous and plastic roofing sheets, roof penetration depth 55 mm, with DRAINJET hood made of stainless steel, according to DIN EN 1253, made of stainless steel, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX798, drain made of stainless steel, DN 70




Date articol

Cod EAN	4038088105948
Clasă ETIM	EC011350
Diametru nominal	DN 70
Dimensiuni exterioare (îxLxA)	190 x 270 x 935 mm
Greutate	5,30 Kg (STK)
Grupă de produse	9
Număr tarif vamal	73072980
Material / Culoare	Edelstahl, Silber

Notă de utilizare

LORO-X Rainstar® Attikaentwässerungssysteme mit geringer Eingrifftiefe von nur 55mm und vorgefertigter Attika-Aufkantung mit Klemm- oder Klebeflansch. Die Aufkantung der Rainstar Attikaentwässerungssysteme bietet als Montagehilfe in der Attika zusätzlichen Halt und verkürzt die Montagezeit. Abgedichtet wird der LORO-X Rainstar jedoch nur auf der horizontalen Ebene, sodass eine Abdichtung in der Aufkantung nicht notwendig ist. Die LORO-X RAINSTAR® Systeme gibt es auch als Serie 79 mit höher Freispiegel-Abflussleistung durch patentiertes, tiefergelegtes Rohr! Vorteile: -nur eine horizontale Abdichtungsebene -Aufkantung als Montagehilfe in der Attika -bis 21,7 l/s als Notentwässerung mit Druckströmung bei 75mm -geringe Eingrifftiefe von nur 55mm (Serie 89)

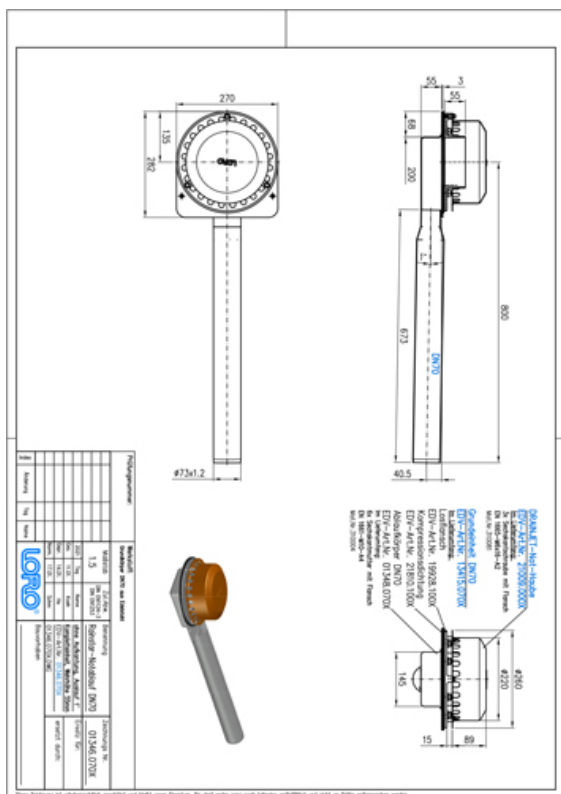

Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)

[Certificat \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Desen CAD \(PDF\)](#)

[Fișă tehnică de sistem LX 798](#)

[BIM 3D \(STEP\)](#)

[Broșură \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)