# Scheda tecnica del prodotto

LORO_Produkt-Datenblatt_01347.050X_it.pdf
Articolo 01347.050X
29.11.2026, 20:40


# LORO-X DRAINJET SCUPPER DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT ROOF PENETRATION,WITH BONDING FLANGE FOR BITUMINOUS ROOFING

**LORO-DRAINJET Attic drain with adhesive flange for bitumen Series 62 DN 50**

## Voce di capitolato

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for main drainage with siphonic flow, discharge rate 7.0 l/s at 55 mm water level on the roof, with bonding flange, 45-degree upstand for bituminous roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX789, made of stainless steel, DN50



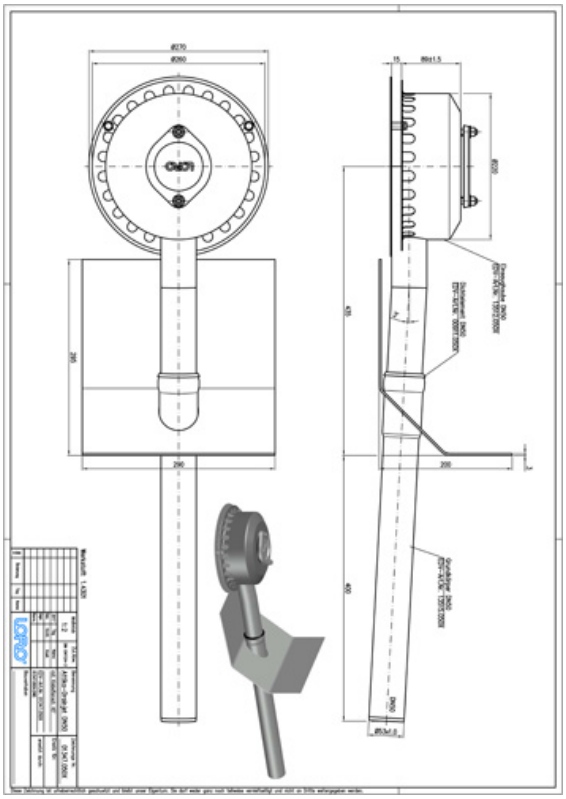

## Dati articolo

| | |
|---|---|
| Codice EAN | **4038088083574** |
| Classe ETIM | **EC010400** |
| Diametro nominale | **DN 50** |
| Misure esterne (AxLxP) | **290 x 896 x 215 mm** |
| Peso | **6,20 Kg (STK)** |
| Gruppo prodotti | **9** |
| Numero tariffa doganale | **73072980** |
| Materiale / Colore | **Edelstahl, Silber** |

## Note d'uso

LORO-DRAINJET® Attika-Schnellabläufe-ohne Eingriff ins Dach mit Klebeflansch, DN 50 und DN 70, für Bitumen-Dachabdichtungsbahnen.

## Download

Alles online

Istruzioni di installazione (PDF)
Certificato (PDF)
CAD 3D (DWG)
Disegno dimensionale (PDF)
Scheda tecnica del sistema LX 789
BIM 3D (STEP)
Brochure (PDF)
CAD 2D (DXF)
BIM 3D (IFC)