
LORO-X DRAINJET SCUPPER DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT ROOF PENETRATION,WITH BONDING FLANGE FOR BITUMINOUS ROOFING

LORO-DRAINJET Attic drain with adhesive flange for bitumen 62 series DN 70

Voce di capitolato

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for main drainage with siphonic flow, discharge rate 16.0 l/s at 55 mm water level on the roof, with bonding flange, 45-degree upstand for bituminous roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX636, made of stainless steel, DN70



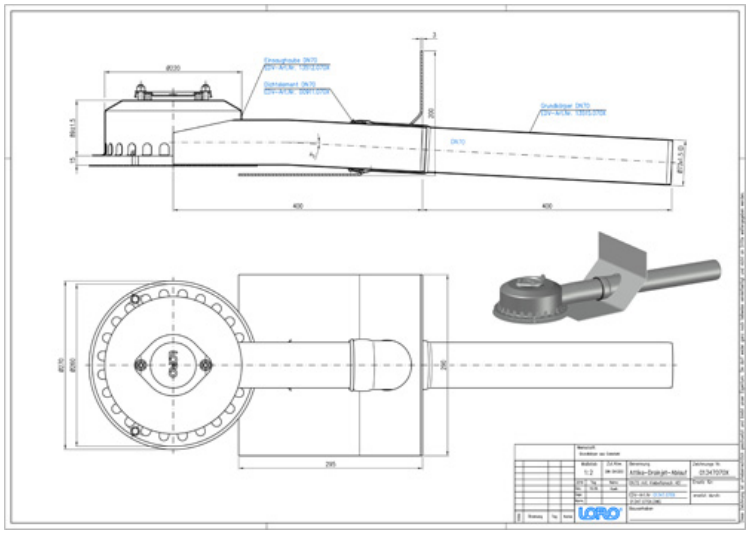

Dati articolo

Codice EAN	4038088083581
Classe ETIM	EC010400
Diametro nominale	DN 70
Misure esterne (AxLxP)	290 x 936 x 215 mm
Peso	7,00 Kg (STK)
Gruppo prodotti	9
Numero tariffa doganale	73072980
Materiale / Colore	Edelstahl, Silber

Note d'uso

LORO-DRAINJET® Attika-Schnellabläufe-ohne Eingriff ins Dach mit Klebeflansch, DN 50 und DN 70, für Bitumen-Dachabdichtungsbahnen.

Download

Alles online

Istruzioni di installazione (PDF)
Certificato (PDF)
CAD 3D (DWG)
Disegno dimensionale (PDF)
Scheda tecnica del sistema LX 636
BIM 3D (STEP)
Brochure (PDF)
CAD 2D (DXF)
BIM 3D (IFC)