
LORO-X DRAINJET SCUPPER EMERGENCY DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT ROOF PENETRATION, WITH BONDING FLANGE FOR

LORO-DRAINJET Attika emergency drain with adhesive flange for bitumen Height 40 mm Series 62 DN 50

Κείμενο προδιαγραφών

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for emergency drainage with siphonic flow, discharge rate 8.5 l/s at 75 mm water level on the roof and 40 mm weir height, with bonding flange, 45-degree upstand for bituminous roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX1326, made of stainless steel, DN50



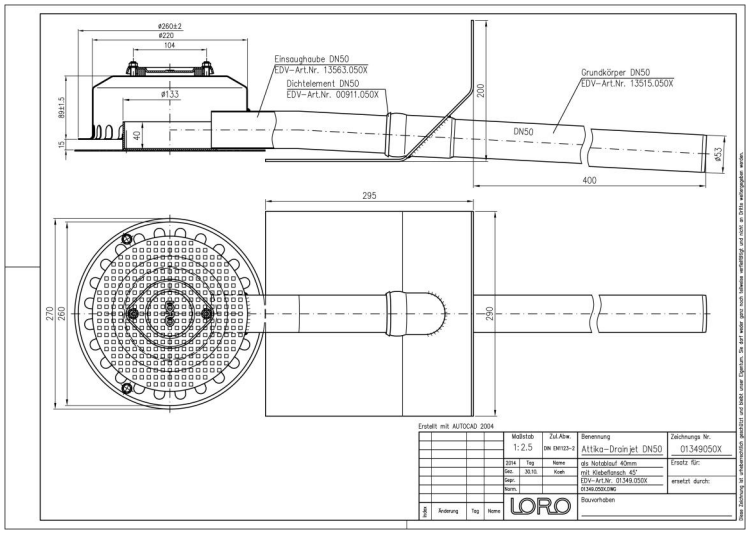

Στοιχεία προϊόντος

Κωδικός EAN	**4038088083598**
Κατηγορία ETIM	**EC010400**
Ονομαστική διάμετρος	**DN 50**
Εξωτερικές διαστάσεις (ΥxΠxΜ)	**290 x 897 x 215 mm**
Βάρος	**6,50 Kg (STK)**
Ομάδα προϊόντων	**9**
Δασμολογικός αριθμός	**73072980**
Υλικό / Χρώμα	**Edelstahl, Silber**

Σημείωση χρήσης

LORO-DRAINJET® Attika-Notabläufe-ohne Eingriff ins Dach mit Klebeflansch, DN 50 und DN 70, für Bitumen-Dachabdichtungsbahnen

Λήψεις

Alles online

Οδηγίες εγκατάστασης (PDF)
Έγκριση (PDF)
CAD (DWG)
Σχέδιο διαστάσεων (PDF)
Φύλλο δεδομένων συστήματος LX 1326
Φυλλάδιο (PDF)
CAD 2D (DXF)