

LORO-X DRAINJET SCUPPER EMERGENCY DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT ROOF PENETRATION, WITH BONDING FLANGE FOR

LORO-DRAINJET Attika emergency drain with adhesive flange for bitumen Weir height 50 mm Series 62 DN 70

Descrição

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for emergency drainage with siphonic flow, discharge rate 14.5 l/s at 75 mm water level on the roof and 50 mm weir height, with bonding flange, 45-degree upstand for bituminous roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX637, made of stainless steel, DN70




Dados do artigo

Código EAN	4038088083604
Classe ETIM	EC010400
Diâmetro nominal	DN 70
Medidas exteriores (AxLxP)	290 x 936 x 215 mm
Peso	6,80 Kg (STK)
Grupo de produtos	9
Número de pauta aduaneira	73072980
Material / Cor	Edelstahl, Silber

Nota de utilização

LORO-DRAINJET® Attika-Notabläufe-ohne Eingriff ins Dach mit Klebeflansch, DN 50 und DN 70, für Bitumen-Dachabdichtungsbahnen

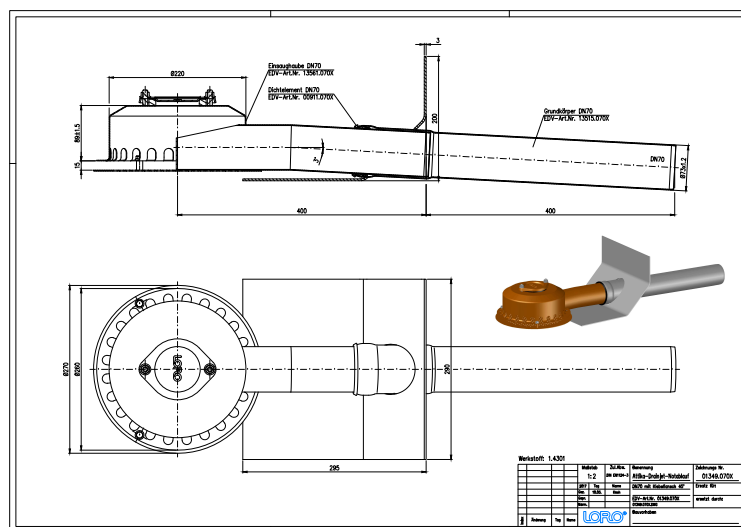

Transferências



Alles online

[Instruções de instalação \(PDF\)](#)

[Homologação \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Desenho cotado \(PDF\)](#)

[Ficha técnica do sistema LX 637](#)

[BIM 3D \(STEP\)](#)

[Brochura \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)