

LORO-X DRAINJET SCUPPER DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT ROOF PENETRATION, WITH CLAMPING FLANGE FOR BITUMINOUS

LORO-DRAINJET parapet drain with clamping flange for bitumen made of stainless steel series 62 DN 50

Descriere

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for main drainage with siphonic flow, discharge rate 7.0 l/s at 55 mm water level on the roof, with clamping flange, as loose and fixed flange construction, 45-degree upstand for bituminous roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2m non-ventilated downpipe according to system data sheet LX789, made of stainless steel, DN50




Date articol

Cod EAN	4038088083536
Clasă ETIM	EC010400
Diametru nominal	DN 50
Dimensiuni exterioare (ÎxLxA)	270 x 926 x 192 mm
Greutate	6,80 Kg (STK)
Grupă de produse	9
Număr tarif vamal	73072980
Material / Culoare	Edelstahl, Silber

Notă de utilizare

LORO-DRAINJET® Attika-Schnellabläufe-ohne Eingriff ins Dach, DN 50 und DN 70, für Bitumen-Dachabdichtungsbahnen

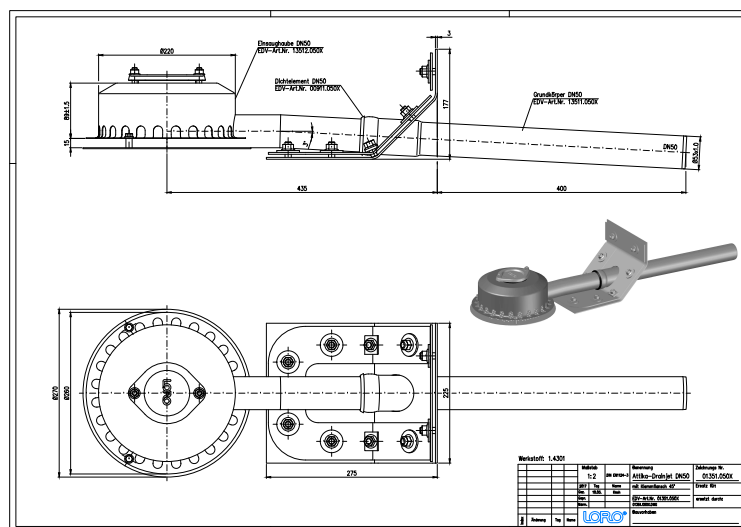

Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)

[Certificat \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Desen CAD \(PDF\)](#)

[Fișă tehnică de sistem LX 789](#)

[BIM 3D \(STEP\)](#)

[Broșură \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)