

## LORO-X DRAINJET SCUPPER DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT ROOF PENETRATION, WITH CLAMPING FLANGE FOR BITUMINOUS

LORO-DRAINJET parapet drain with clamping flange for bitumen made of stainless steel series 62 DN 50

### Описание

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for main drainage with siphonic flow, discharge rate 7.0 l/s at 55 mm water level on the roof, with clamping flange, as loose and fixed flange construction, 45-degree upstand for bituminous roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2m non-ventilated downpipe according to system data sheet LX789, made of stainless steel, DN50




### Данни за артикула

|                          |                    |
|--------------------------|--------------------|
| ЕАН код                  | 4038088083536      |
| ЕТИМ клас                | EC010400           |
| Номинален диаметър       | DN 50              |
| Външни размери (ВxШxД)   | 270 x 926 x 192 mm |
| Тегло                    | 6,80 Kg (STK)      |
| Продуктова група         | 9                  |
| Митнически тарифен номер | 73072980           |
| Материал / Цвят          | Edelstahl, Silber  |

### Забележка за употреба

LORO-DRAINJET® Attika-Schnellabläufe-ohne Eingriff ins Dach, DN 50 und DN 70, für Bitumen-Dachabdichtungsbahnen

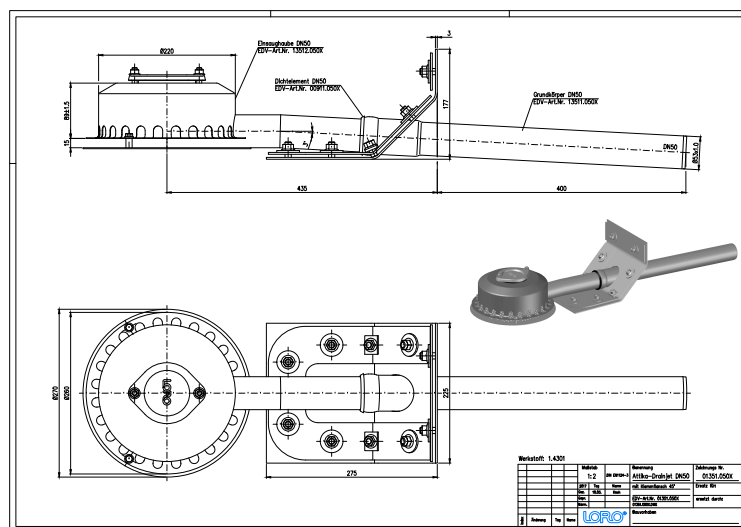

### Изтегляния



Alles online

[Инструкция за монтаж \(PDF\)](#)

[Сертификат \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[CAD чертеж \(PDF\)](#)

[Системен технически лист LX 789](#)

[BIM 3D \(STEP\)](#)

[Брошура \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)