


**LORO-X DRAINJET SCUPPER DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT
ROOF PENETRATION,WITH CLAMPING FLANGE FOR BITUMINOUS**

LORO-DRAINJET Attic drain with clamping flange for bitumen made of stainless steel series 62 DN 70

Description

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for main drainage with siphonic flow, discharge rate 16.0 l/s at 55 mm water level on the roof, with clamping flange, as loose and fixed flange construction, 45-degree upstand for bituminous roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2m non-ventilated downpipe according to system data sheet LX636, made of stainless steel, DN70

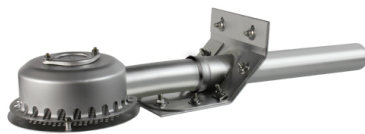


Article information

EAN Code	4038088066096
ETIM Class	EC010400
Nominal diameter	DN 70
Outside measurements (HxWxL)	270 x 927 x 192 mm
Weight	7,40 Kg (STK)
Product group	9
Customs tariff number	73072980
Material / Color	Edelstahl, Silber

Usage note

LORO-DRAINJET® Attika-Schnellabläufe-ohne Eingriff
ins Dach, DN 50 und DN 70, für Bitumen-
Dachabdichtungsbahnen

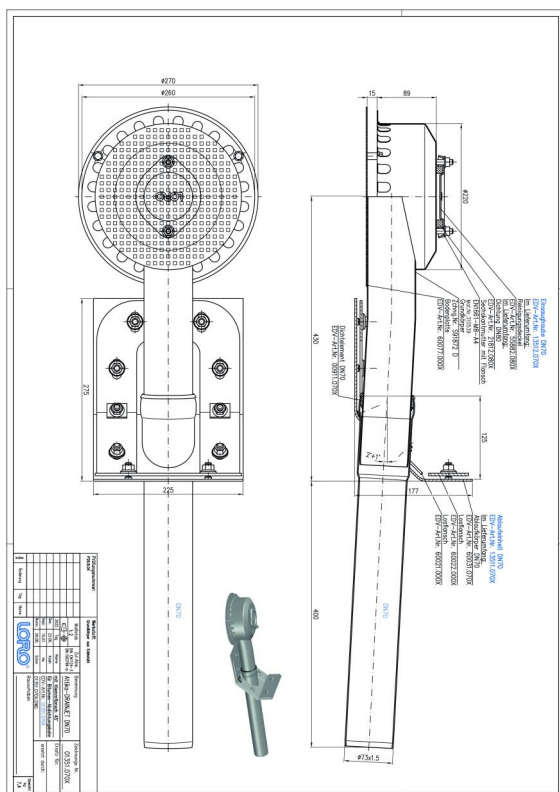

Downloads



Alles online

[Installation \(PDF\)](#)

[Certificate \(PDF\)](#)

CAD 3D (DWG)

[CAD drawing \(PDF\)](#)

System data sheet LX 636

BIM 3D (STEP)

[Brochure \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)