

**LORO-X DRAINJET SCUPPER DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT
ROOF PENETRATION, WITH CLAMPING FLANGE FOR PLASTIC ROOFING**

LORO-DRAINJET Attic drain with clamping flange for plastic Series 62 DN 70

Description

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for main drainage with siphonic flow, discharge rate 16.0 l/s at 55 mm water level on the roof, with clamping flange, as loose and fixed flange construction, 90-degree upstand for plastic roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2m non-ventilated downpipe according to system data sheet LX636, made of stainless steel, DN70




Données de l'article

Code EAN	4038088066126
Classe ETIM	EC010400
Diamètre nominal	DN 70
Dimensions extérieures (HxLxP)	270 x 869 x 188 mm
Poids	8,10 Kg (STK)
Groupe de produits	9
Numéro tarifaire douanier	73072980
Matériau / Couleur	Edelstahl, Silber

Note d'utilisation

LORO-DRAINJET® Attika-Schnellabläufe-ohne Eingriff
ins Dach, DN 50 und DN 70, für Kunststoff-
Dachabdichtungsbahnen

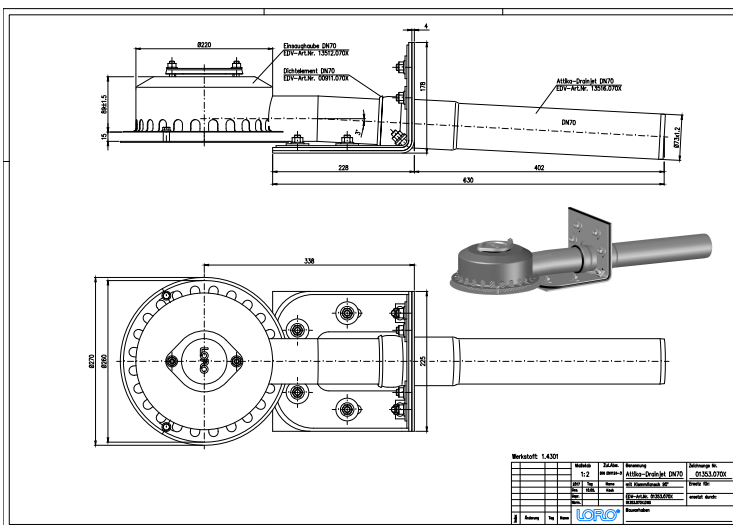

Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

[Certificat \(PDF\)](#)

CAD 3D (DWG)

[Dessin dimensionnel \(PDF\)](#)

Fiche technique du système LX 636

BIM 3D (STEP)

[Brochure \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)