## LORO-X RAINSTAR SCUPPER EMERGENCY DRAIN WITH CLAMPING FLANGE, WITH CUT-OUT DEPTH OF 55 MM FOR PLASTIC ROOFING SHEETS

**LORO-RAINSTAR Attika emergency drain, stainless steel 55 mm installation depth Clamping flange for plastic gravity flow DN100**

### Kuvaus

LORO-X RAINSTAR parapet drain, series 89 with low penetration depth, for emergency drainage with gravity flow, made of stainless steel, DN100, with clamping flange, as loose and fixed flange construction, 90-degree upstand for plastic roofing sheets, roof penetration depth 55 mm, with DRAINLET hood made of stainless steel, according to DIN EN 1253, discharge rate 8.0 l/sec at 75 mm water level on the roof with 4.2 m non-ventilated downpipe according to system data sheet LX668, discharge rate 4.6 l/sec at 75 mm water level on the roof as spout according to system data sheet LX667

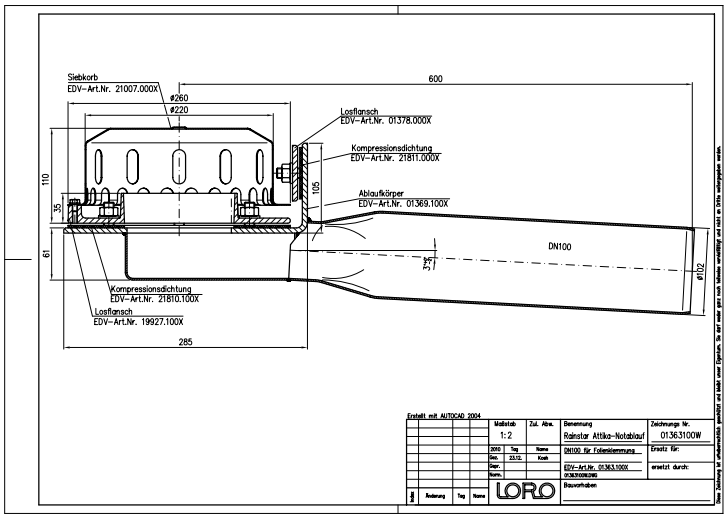


### Tuotetiedot

| | |
|---|---|
| EAN-koodi | 4038088074732 |
| ETIM-luokka | EC010400 |
| Nimellishalkaisija | DN 100 |
| Ulkomitat (KxLxS) | 270 x 738 x 215 mm |
| Paino | 6,10 Kg (STK) |
| Tuoteryhmä | 9 |
| Tullitariffin numero | 73072980 |
| Materiaali / Väri | Edelstahl, Silber |

### Käyttöohje

LORO-X Rainstar® Attikaentwässerungssysteme mit geringer Eingrifftiefe von nur 55mm und vorgefertigter Attika-Aufkantung mit Klemm- oder Klebeflansch.Die Aufkantung der Rainstar Attikaentwässerungssysteme bietet als Montagehilfe in der Attika zusätzlichen Halt und verkürzt die Montagezeit. Abgedichtet wird der LORO-X Rainstar jedoch nur auf der horizontalen Ebene, sodass eine Abdichtung in der Aufkantung nicht notwendig ist. Die LORO-X RAINSTAR® Systeme gibt es auch als Serie 79 mit höher Freispiegel-Abflussleistung durch patentiertes, tiefergelegtes Rohr! Vorteile: -nur eine horizontale Abdichtungsebene -Aufkantung als Montagehilfe in der Attika -bis 21,7 l/s als Notentwässerung mit Druckströmung bei 75mm -geringe Eingrifftiefe von nur 55mm (Serie 89)

### Lataukset

Alles online

Asennusohje (PDF)
Hyväksyntä (PDF)
CAD 2D (DXF)
Mittapiirustus (PDF)
Järjestelmän datalehti LX 667
CAD (DWG)
Esite (PDF)
Järjestelmän datalehti LX 668
BIM Revit (RFA)