LORO-X RAINSTAR SCUPPER DRAIN, SIPHONIC FLOW, WITH CLAMPING FLANGE, WITH CUT-OUT DEPTH OF 50 MM FOR BITUMINOUS ROOFING

LORO-RAINSTAR Attic drain stainless steel 55mm installation depth Clamping flange for bitumen pressure pipe DN100

Descrizione

LORO-X RAINSTAR siphonic parapet drain, series 89 with low penetration depth, for main drainage with siphonic flow, discharge rate 14.0 l/s at 55 mm water level on the roof, with clamping flange, as loose and fixed flange construction, 45-degree upstand for bituminous roofing sheets, roof penetration depth 55 mm, with DRAINJET hood made of stainless steel, according to DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX665, made of stainless steel, DN100

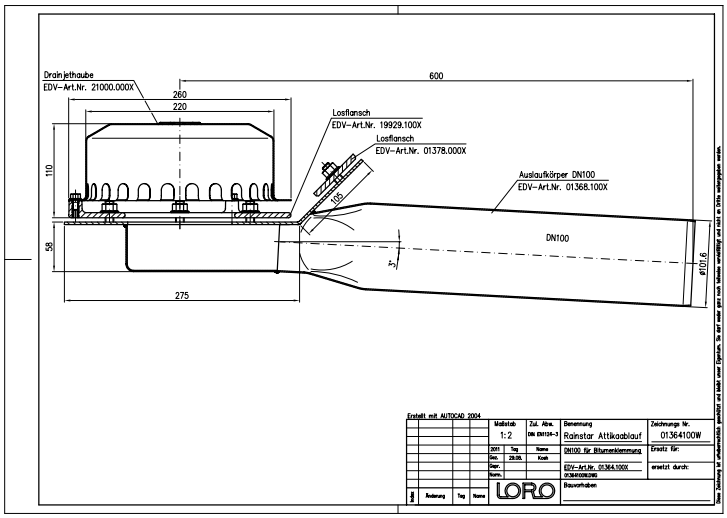

Dati articolo

Codice EAN	**4038088074756**
Classe ETIM	**EC011350**
Diametro nominale	**DN 100**
Misure esterne (AxLxP)	**270 x 738 x 215 mm**
Peso	**5,80 Kg (STK)**
Gruppo prodotti	**9**
Numero tariffa doganale	**73072980**
Materiale / Colore	**Edelstahl, Silber**

Note d'uso

LORO-X Rainstar® Attikaentwässerungssysteme mit geringer Eingrifftiefe von nur 55mm und vorgefertigter Attika-Aufkantung mit Klemm- oder Klebeflansch.Die Aufkantung der Rainstar Attikaentwässerungssysteme bietet als Montagehilfe in der Attika zusätzlichen Halt und verkürzt die Montagezeit. Abgedichtet wird der LORO-X Rainstar jedoch nur auf der horizontalen Ebene, sodass eine Abdichtung in der Aufkantung nicht notwendig ist. Die LORO-X RAINSTAR® Systeme gibt es auch als Serie 79 mit höher Freispiegel-Abflussleistung durch patentiertes, tiefergelegtes Rohr! Vorteile: -nur eine horizontale Abdichtungsebene -Aufkantung als Montagehilfe in der Attika -bis 21,7 l/s als Notentwässerung mit Druckströmung bei 75mm -geringe Eingrifftiefe von nur 55mm (Serie 89)

Download

Alles online

- Istruzioni di installazione (PDF)
- Certificato (PDF)
- CAD (DWG)
- Disegno dimensionale (PDF)
- Scheda tecnica del sistema LX 665
- BIM Revit (RFA)
- Brochure (PDF)
- CAD 2D (DXF)