


LORO-X RAINSTAR SCUPPER EMERGENCY DRAIN, SIPHONIC FLOW, SERIES 88 DISTANT, WITHOUT RAISED EDGE, WITH CLAMPING FLANGE, FOR

4.1 LORO-RAINSTAR stainless steel parapet drain without backsplash with clamping flange pressure flow DN 40

Descrizione

LORO-X RAINSTAR siphonic parapet drain, series 88 without upstand, for emergency drainage with siphonic flow, discharge rate 4.5 l/s at 75 mm water level on the roof, with clamping flange, as loose and fixed flange construction, without upstand for bituminous and plastic roofing sheets, roof penetration depth 76 mm, with DRAINJET hood made of stainless steel, according to DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX682, made of stainless steel, DN40

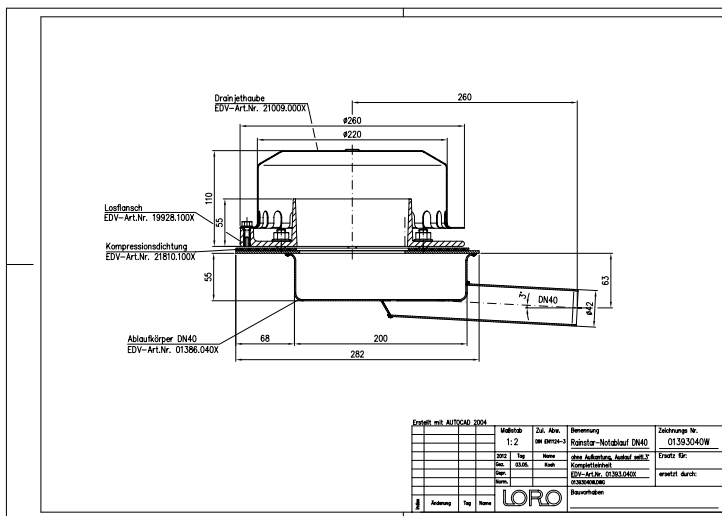

Dati articolo

Codice EAN	4038088075753
Classe ETIM	EC010400
Diametro nominale	DN 40
Misure esterne (AxLxP)	270 x 397 x 205 mm
Peso	3,90 Kg (STK)
Gruppo prodotti	9
Numero tariffa doganale	73072980
Materiale / Colore	Edelstahl, Silber

Note d'uso

LORO-X RAINSTAR-Distant Attikaentwässerung ohne
 Aufkantung ermöglicht den Einbau des Ablaufes in
 variablem Abstand zur Attika. So ist es möglich die
 Dachschräge zur Attika wieder ansteigen zu lassen und
 den tiefsten Punkt weiter zur Dachmitte zu verlagern.
 Die Verlegung des waagerechten Rohres kann z.B.
 innerhalb der Wärmedämmung erfolgen.Die
 Abdichtung erfolgt nur in einer Ebene mit LORO-
 Klemmflansch. Die Silent-Power Druckströmung in
 Kombination mit der patentierten 2-stufigen
 Beschleunigung des Wassers im Ablauf sorgt für starke
 Abflussleistung von bis zu 21 l/s.Zu beachten ist
 jedoch, dass ein zu großer Abstand zur Attika die
 Abflussleistung beeinträchtigen kann.Vorteile: -
 Variable Entfernung zur Attika -bis 21,7 l/s bei
 Notentwässerung mit Druckströmung bei 75mm -hohe
 Abflussleistung durch patentiertes, tiefergelegtes Rohr
 -nur eine horizontale Abdichtungsebene -patentiertes
 Notentwässerungswehr unter der Haube

Download



Alles online

[Istruzioni di installazione \(PDF\)](#)

[Certificato \(PDF\)](#)

CAD (DWG)

[Disegno dimensionale \(PDF\)](#)

Scheda tecnica del sistema LX 682

BIM Revit (RFA)

[Brochure \(PDF\)](#)

CAD 2D (DXF)