

LORO-X RAINSTAR SCUPPER EMERGENCY DRAIN, SIPHONIC FLOW, SERIES 88 DISTANT, WITHOUT RAISED EDGE, WITH CLAMPING FLANGE, FOR LORO-RAINSTAR stainless steel parapet emergency drain without upstand with clamping flange pressure outlet DN 70

Beskrivelse

LORO-X RAINSTAR siphonic parapet drain, series 88 without upstand, for emergency drainage with siphonic flow, discharge rate 17.6 l/s at 75 mm water level on the roof, with clamping flange, as loose and fixed flange construction, without upstand for bituminous and plastic roofing sheets, roof penetration depth 92 mm, with DRAINJET hood made of stainless steel, according to DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX466, made of stainless steel, DN70




Artikkeldata

EAN-kode	4038088074138
ETIM-klasse	EC010400
Nominell diameter	DN 70
Utvendige mål (HxBxL)	270 x 397 x 219 mm
Vekt	4,20 Kg (STK)
Produktgruppe	9
Tolltariffnummer	73072980
Materiale / Farge	Edelstahl, Silber

Bruksanvisning

LORO-X RAINSTAR-Distant Attikaentwässerung ohne Aufkantung ermöglicht den Einbau des Ablaufes in variablem Abstand zur Attika. So ist es möglich die Dachschräge zur Attika wieder ansteigen zu lassen und den tiefsten Punkt weiter zur Dachmitte zu verlagern. Die Verlegung des waagerechten Rohres kann z.B. innerhalb der Wärmedämmung erfolgen. Die Abdichtung erfolgt nur in einer Ebene mit LORO-Klemmflansch. Die Silent-Power Druckströmung in Kombination mit der patentierten 2-stufigen Beschleunigung des Wassers im Ablauf sorgt für starke Abflussleistung von bis zu 21 l/s. Zu beachten ist jedoch, dass ein zu großer Abstand zur Attika die Abflussleistung beeinträchtigen kann. Vorteile: - Variable Entfernung zur Attika -bis 21,7 l/s bei Notentwässerung mit Druckströmung bei 75mm -hohe Abflussleistung durch patentiertes, tiefergelegtes Rohr -nur eine horizontale Abdichtungsebene -patentiertes Notentwässerungswehr unter der Haube

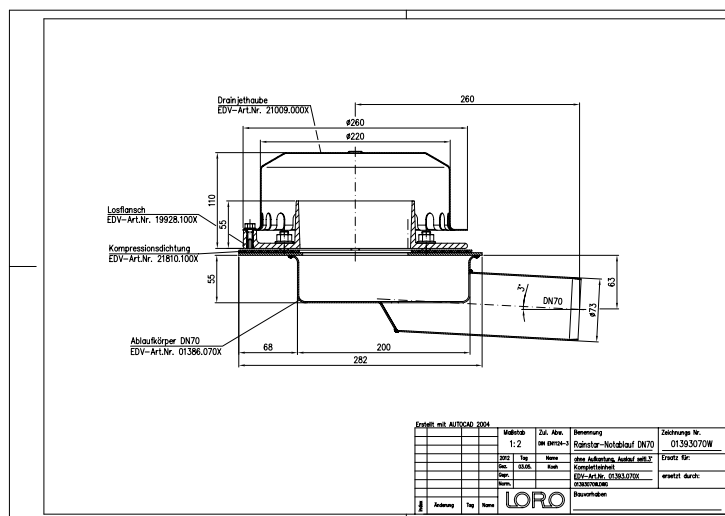

Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkjenning \(PDF\)](#)

[CAD \(DWG\)](#)

[Måltegning \(PDF\)](#)

[Systemdatablad LX 466](#)

[BIM Revit \(RFA\)](#)

[Brosjyre \(PDF\)](#)

[CAD 2D \(DXF\)](#)