


LORO-X BOGEN MUFFENL.O.IBESCH.88GR.DN250

LORO-X bend 88 degrees socketless without internal coating 88 degree DN 250

Tekst przetargowy

LORO-XML bend, made of steel, hot-dip galvanized, without socket, according to DIN EN 1123, with raised quality standard, building material class A1, dimensionally stable, break-proof, backflow-safe, approval no. Z-42.1-346 from DIBt, 88 degrees, without internal coating, DN250

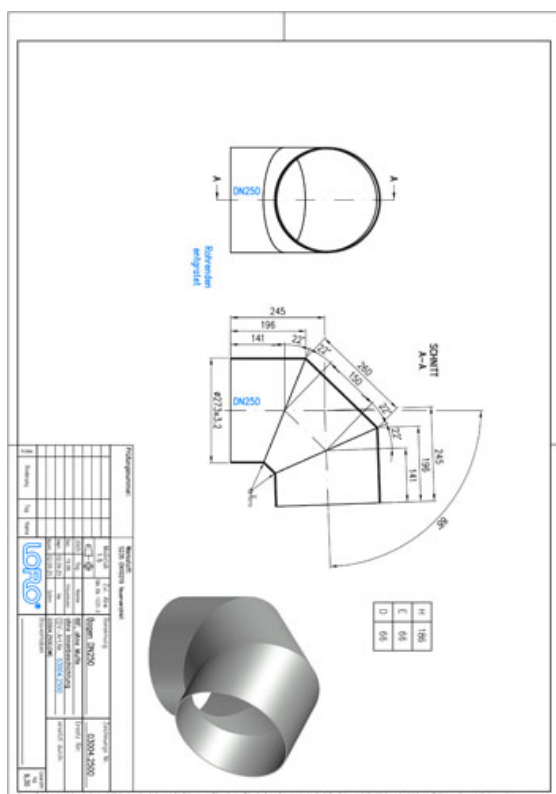

Dane artykułu

Kod EAN	4038088109892
Klasa ETIM	EC003024
Średnica nominalna	DN 250
Długość/stożek nominalny	88
Wymiary zewnętrzne (WxSxD)	273 x 382 x 382 mm
Waga	9,30 Kg (STK)
Grupa produktów	1
Numer taryfy celnej	73063012
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

LORO-XML Stahlabflussrohre muffenlos in DN 250 und DN 300, aus Stahl, feuerverzinkt. Für große Nennweiten hat LORO muffenlose Stahlabflussrohrsysteme für die Regenentwässerung in DN 250 und DN 300 mit bauaufsichtlicher Zulassung Nr. Z-42.1-346 vom DIBt in sein Entwässerungsprogramm aufgenommen. Durch die Verwendung einer muffenlosen Verbindung wird die Verlegung mit einem CV-Verbinder für große Nennweiten wesentlich vereinfacht.

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[Certyfikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Rysunek wymiarowy \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametryczny\)](#)

[Broszura \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)