
LORO-X STANDROHR O.R-DECK.AUSLAUF 110,

LORO-X standpipe without cleaning cover outlet 110 DN 100

Beskrivningstext

LORO-X renovation rain standpipe, made of steel, hot-dip galvanized, round, without clean-out opening, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, with 110 mm outlet for transition to the underground pipe made of cast iron pipe or to plastic pipe, 1000 mm, DN100



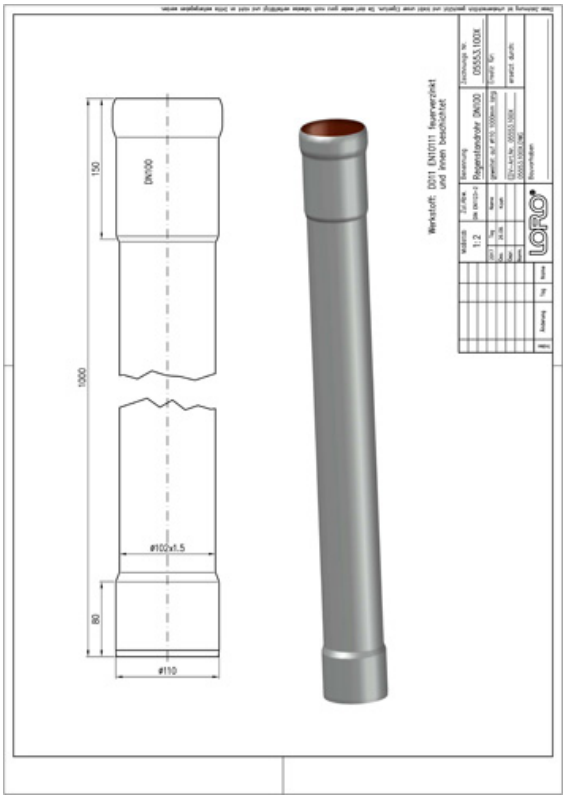

Artikeldata

EAN-kod	4038088077320
ETIM-klass	EC011386
Nominell diameter	DN 100
Nominell längd/grad	1000
Yttermått (HxBxL)	118 x 118 x 1000 mm
Vikt	4,70 Kg (STK)
Produktgrupp	2
Tullnummer	73063012
Material / Färg	Stahl feuerverzinkt, Silber

Användningsanvisning

LORO-X Sanierungsstandrohre sind am unteren Auslaufende für den direkten Anschluss an SML Rohre aufgeweitet (110mm bzw. 125mm), sodass sie direkt mit einem CV-/CE-Verbinder auf entsprechend abgetrennte Rohre montiert werden können.

Nedladdningar

Alles online

Monteringsanvisning (PDF)
Godkännande (PDF)
BIM 3D (STEP)
Måttritning (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Broschyr (PDF)
CAD 3D (DWG)