


LORO-X STANDROHR O.R-DECK.AUSLAUF 110,

LORO-X standpipe without cleaning cover outlet 110 DN 100

Текст за тръжна документация

LORO-X renovation rain standpipe, made of steel, hot-dip galvanized, round, without clean-out opening, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, with 110 mm outlet for transition to the underground pipe made of cast iron pipe or to plastic pipe, 1000 mm, DN100

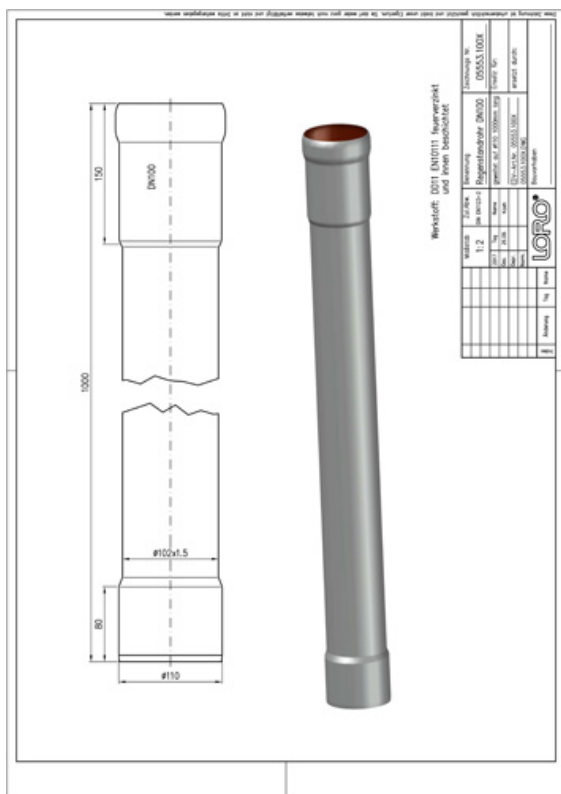

Данни за артикула

ЕАН код	4038088077320
ЕТИМ клас	EC011386
Номинален диаметър	DN 100
Номинална дължина/градус	1000
Външни размери (ВхШхД)	118 x 118 x 1000 mm
Тегло	4,70 Kg (STK)
Продуктова група	2
Митнически тарифен номер	73063012
Материал / Цвят	Stahl feuerverzinkt, Silber

Забележка за употреба

LORO-X Sanierungsstandrohre sind am unteren Auslaufende für den direkten Anschluss an SML Rohre aufgeweitet (110mm bzw. 125mm), sodass sie direkt mit einem CV-/CE-Verbinder auf entsprechend abgetrennte Rohre montiert werden können.

Изтегляния



Alles online

[Инструкция за монтаж \(PDF\)](#)

[Сертификат \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[CAD чертеж \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Брошура \(PDF\)](#)

[CAD 3D \(DWG\)](#)