


LORO-X STANDROHR O.R-DECK.AUSLAUF 110,

LORO-X standpipe without cleaning cover outlet 110 DN 100

Bestektekst

LORO-X renovation rain standpipe, made of steel, hot-dip galvanized, round, without clean-out opening, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, with 110 mm outlet for transition to the underground pipe made of cast iron pipe or to plastic pipe, 1000 mm, DN100

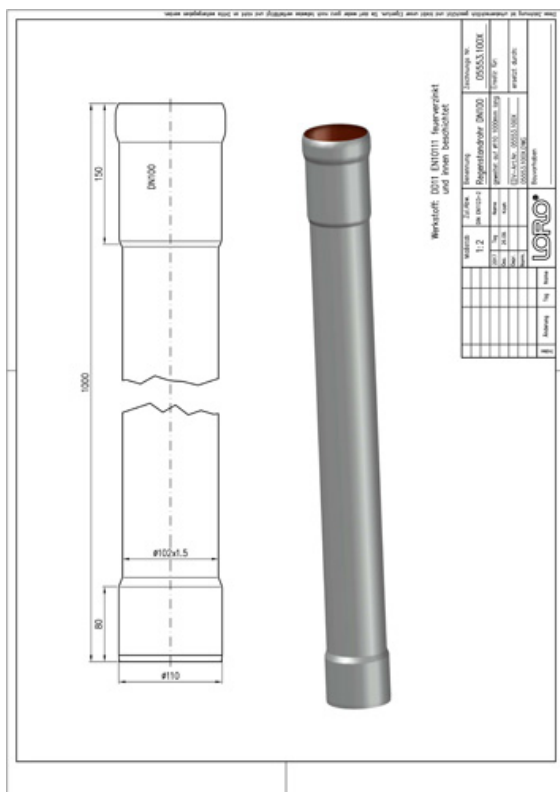

Artikelgegevens

EAN-code	4038088077320
ETIM Klasse	EC011386
Nominale diameter	DN 100
Nominale lengte/graad	1000
Buitenafmetingen (HxBxL)	118 x 118 x 1000 mm
Gewicht	4,70 Kg (STK)
Productgroep	2
Douanetariefnumme	73063012
r	
Materiaal / Kleur	Stahl feuerverzinkt, Silber

Gebruiksaanwijzing

LORO-X Sanierungsstandrohre sind am unteren Auslaufende für den direkten Anschluss an SML Rohre aufgeweitet (110mm bzw. 125mm), sodass sie direkt mit einem CV-/CE-Verbinder auf entsprechend abgetrennte Rohre montiert werden können.

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

[Certificaat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Maattekening \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Brochure \(PDF\)](#)

[CAD 3D \(DWG\)](#)