


LORO-X STANDROHR O.R-DECK.AUSLAUF 110,

LORO-X standpipe without cleaning cover outlet 110 DN 100

Text pro výběrové řízení

LORO-X renovation rain standpipe, made of steel, hot-dip galvanized, round, without clean-out opening, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, with 110 mm outlet for transition to the underground pipe made of cast iron pipe or to plastic pipe, 1000 mm, DN100

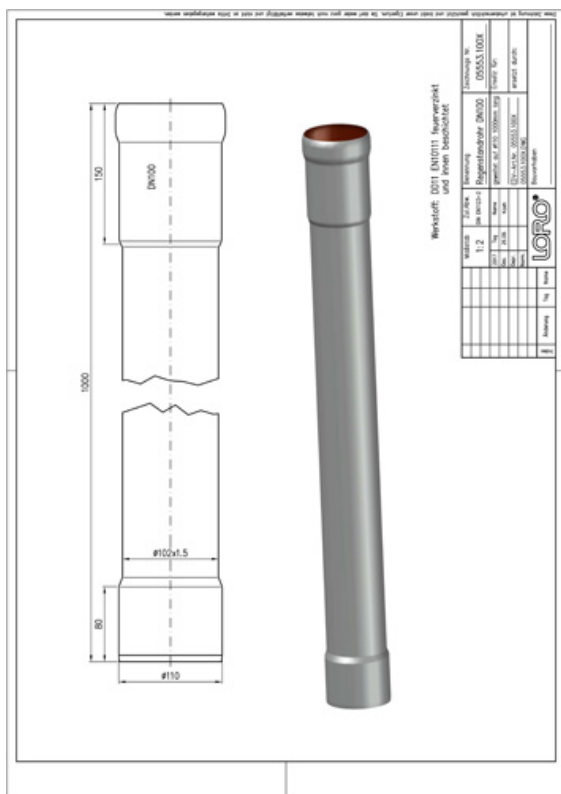

Údaje o artiklu

EAN kód	4038088077320
ETIM třída	EC011386
Jmenovitý průměr	DN 100
Jmenovitá délka/stupeň	1000
Vnější rozměry (VxŠxD)	118 x 118 x 1000 mm
Hmotnost	4,70 Kg (STK)
Skupina produktů	2
Celní sazebník	73063012
Materiál / Barva	Stahl feuerverzinkt, Silber

Pokyny k použití

LORO-X Sanierungsstandrohre sind am unteren Auslaufende für den direkten Anschluss an SML Rohre aufgeweitet (110mm bzw. 125mm), sodass sie direkt mit einem CV-/CE-Verbinder auf entsprechend abgetrennte Rohre montiert werden können.

Ke stažení



Alles online

[Návod k instalaci \(PDF\)](#)

[Certifikát \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Výkres rozměrů \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Prospekt \(PDF\)](#)

[CAD 3D \(DWG\)](#)