


LORO-X STANDROHR O.R-DECK.AUSLAUF 110,

LORO-X standpipe without cleaning cover outlet 110 DN 100

Texte de prescription

LORO-X renovation rain standpipe, made of steel, hot-dip galvanized, round, without clean-out opening, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, with 110 mm outlet for transition to the underground pipe made of cast iron pipe or to plastic pipe, 1000 mm, DN100

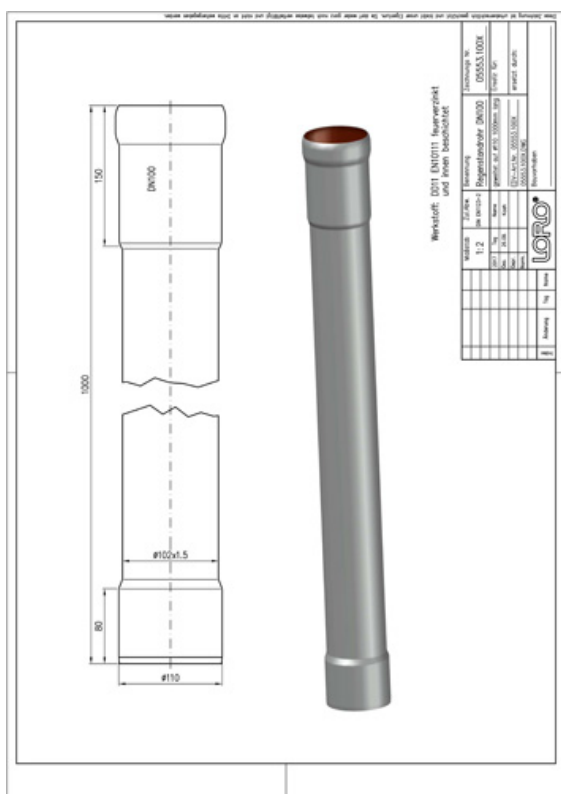

Données de l'article

Code EAN	4038088077320
Classe ETIM	EC011386
Diamètre nominal	DN 100
Longueur/degré nominal	1000
Dimensions extérieures (HxLxP)	118 x 118 x 1000 mm
Poids	4,70 Kg (STK)
Groupe de produits	2
Numéro tarifaire douanier	73063012
Matériau / Couleur	Stahl feuerverzinkt, Silber

Note d'utilisation

LORO-X Sanierungsstandrohre sind am unteren Auslaufende für den direkten Anschluss an SML Rohre aufgeweitet (110mm bzw. 125mm), sodass sie direkt mit einem CV-/CE-Verbinder auf entsprechend abgetrennte Rohre montiert werden können.

Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

[Certificat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Dessin dimensionnel \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Brochure \(PDF\)](#)

[CAD 3D \(DWG\)](#)