


LORO-X STANDROHR O.R-DECK.AUSLAUF 110,

LORO-X standpipe without cleaning cover outlet 110 DN 100

Beskrivelsestekst

LORO-X renovation rain standpipe, made of steel, hot-dip galvanized, round, without clean-out opening, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, with 110 mm outlet for transition to the underground pipe made of cast iron pipe or to plastic pipe, 1000 mm, DN100

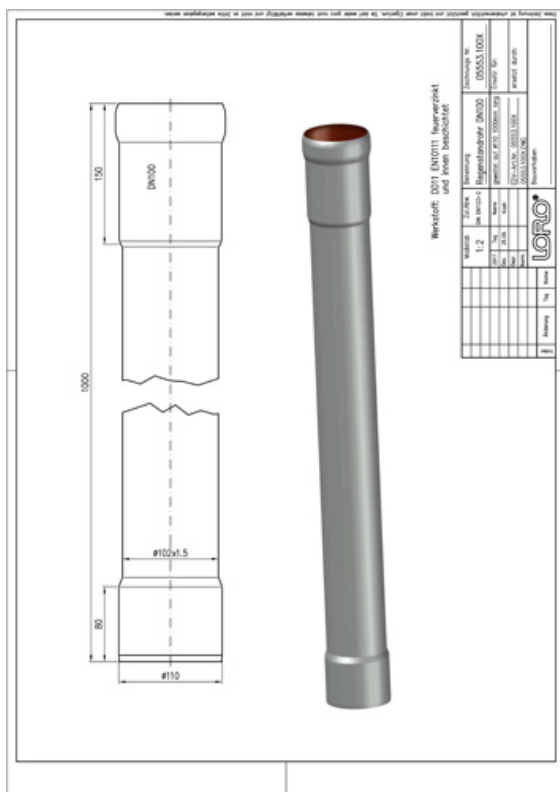

Artikkeldata

EAN-kode	4038088077320
ETIM-klasse	EC011386
Nominell diameter	DN 100
Nominell lengde/grad	1000
Utvendige mål (HxBxL)	118 x 118 x 1000 mm
Vekt	4,70 Kg (STK)
Produktgruppe	2
Tolltariffnummer	73063012
Materiale / Farge	Stahl feuerverzinkt, Silber

Bruksanvisning

LORO-X Sanierungsstandrohre sind am unteren Auslaufende für den direkten Anschluss an SML Rohre aufgeweitet (110mm bzw. 125mm), sodass sie direkt mit einem CV-/CE-Verbinder auf entsprechend abgetrennte Rohre montiert werden können.

Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)
[Godkjenning \(PDF\)](#)
[BIM 3D \(STEP\)](#)
[Måltegning \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM 3D \(IFC\)](#)
[Brosjyre \(PDF\)](#)
[CAD 3D \(DWG\)](#)