LORO-X STANDR.M.R-DECK.AUSL.110,2000 MM

LORO-X standpipe with cleaning cover outlet 1102000 mm

Opis

LORO-X renovation rain standpipe, made of steel, hot-dip galvanized, round, with clean-out opening, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, with 110 mm outlet for transition to the underground pipe made of cast iron pipe or to plastic pipe, 2000 mm, DN100

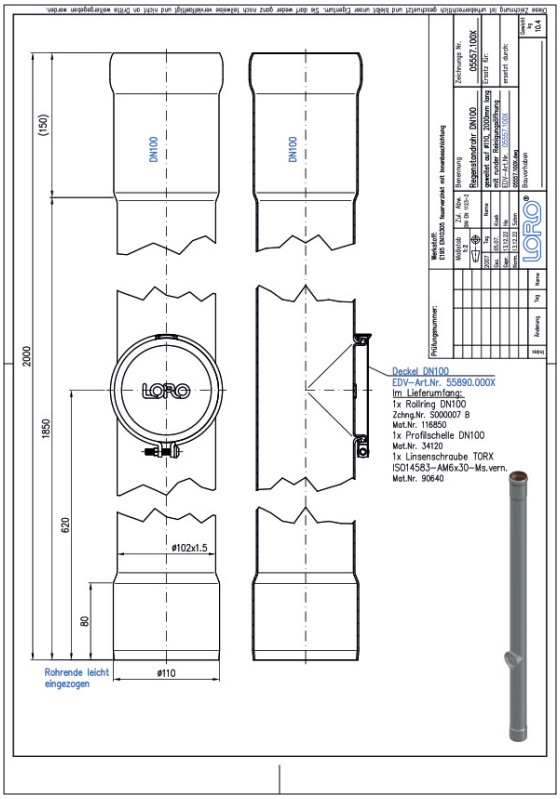

Dane artykułu

Kod EAN	**4038088082683**
Klasa ETIM	**EC011386**
Średnica nominalna	**DN 100**
Długość/stopień nominalny	**2000**
Wymiary zewnętrzne (WxSxD)	**118 x 126 x 2000 mm**
Waga	**10,40 Kg (STK)**
Grupa produktów	**2**
Numer taryfy celnej	**73063012**
Materiał / Kolor	**Stahl feuerverzinkt, Silber**

Wskazówki dotyczące użytkowania

LORO-X Sanierungsstandrohre sind am unteren Auslaufende für den direkten Anschluss an SML Rohre aufgeweitet (110mm bzw. 125mm), sodass sie direkt mit einem CV-/CE-Verbinder auf entsprechend abgetrennte Rohre montiert werden können.

Pobieranie

Alles online

- Instrukcja montażu (PDF)
- Certyfikat (PDF)
- BIM 3D (STEP)
- Rysunek wymiarowy (PDF)
- CAD 2D (DXF)
- BIM 3D (IFC)
- Broszura (PDF)
- CAD 3D (DWG)