

LORO-X ADJUSTMENT PIECE FOR SIPHONIC FLOW DN 250/200

LORO-X DRAINJET balancing piece for pressure flow DN 250/200

Описание

LORO-Drainjet adjustment piece for siphonic flow, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 250/200




Данни за артикула

ЕАН код	4038088074534
ЕТИМ клас	EC003024
Номинален диаметър	DN 250, DN 200
Външни размери (ВxШxД)	273 x 273 x 300 mm
Тегло	5,80 Kg (STK)
Продуктова група	1
Митнически тарифен номер	73089098
Материал / Цвят	Stahl feuerverzinkt, Silber

Забележка за употреба

LORO-XML Stahlabflussrohre muffenlos in DN 250 und DN 200, aus Stahl, feuerverzinkt. Für große Nennweiten hat LORO muffenlose Stahlabflussrohrsysteme für die Regenentwässerung in DN 250 und DN 300 mit bauaufsichtlicher Zulassung Nr. Z-42.1-346 vom DIBt in sein Entwässerungsprogramm aufgenommen. Durch die Verwendung einer muffenlosen Verbindung wird die Verlegung mit einem CV-Verbinder für große Nennweiten wesentlich vereinfacht.

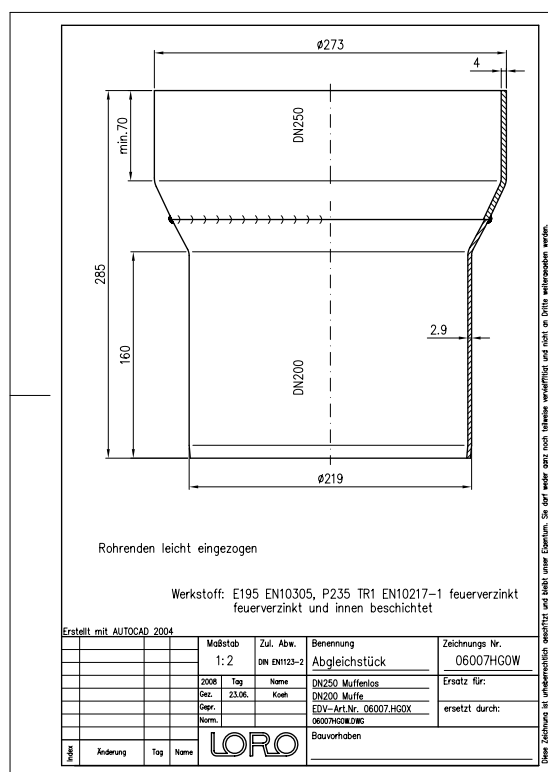

Изтегляния



Alles online

[Инструкция за монтаж \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[CAD чертеж \(PDF\)](#)

[CAD \(DWG\)](#)

[Брошура \(PDF\)](#)