
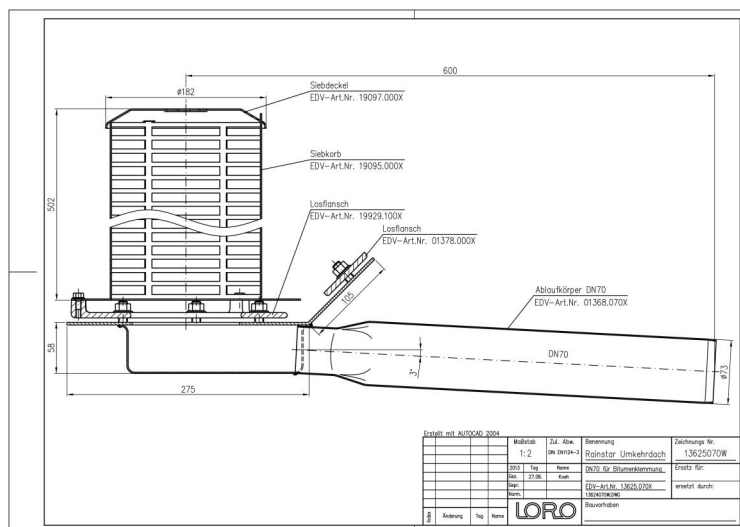


LORO-ATTIKA-ABL.FREISP.F.UMKEHRD.M.KLEMM

LORO-Attika drain free-standing mirror installation inverted roof with clamping flange for bitumen screening unit 495 mm DN 70

Descrizione

LORO - RAINSTAR parapet drain for inverted roof, for gravity flow, according to DIN EN 1253, with 45 clamping flange, as loose and fixed flange construction, for bituminous roofing sheets, made of stainless steel and strainer unit for inverted roof, for installation height 495 mm, consisting of strainer basket and strainer cover, made of stainless steel, DN70



Dati articolo

Codice EAN	4038088093894
Classe ETIM	EC011350
Diametro nominale	DN 70
Misure esterne (AxLxP)	270 x 737 x 334 mm
Peso	6,80 Kg (STK)
Gruppo prodotti	9
Numero tariffa doganale	73072980
Materiale / Colore	Edelstahl, Silber

Note d'uso

LORO-X Serie 89 Attikaentwässerung mit hohem Siebkorb - und zusätzlich höhenvariablem Wehr bei der Notentwässerung eignet sich insbesondere für Umkehrdächer. Die unter der Wärmedämmung liegende Abdichtungsbahn wird in den unten angeordneten Ablaufkörper eingeklemmt. Die Höhe des Siebkorb - und bei der Notentwässerung die Höhe des höhenvariablen Wehres - richtet sich nach der Höhe der Wärmedämmung und der darüber liegenden Bekiesung.

Download



Alles online

[Istruzioni di installazione \(PDF\)](#)
[Certificato \(PDF\)](#)
[BIM 3D \(STEP\)](#)

[Disegno dimensionale \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM 3D \(IFC\)](#)

[Brochure \(PDF\)](#)
[CAD 3D \(DWG\)](#)