
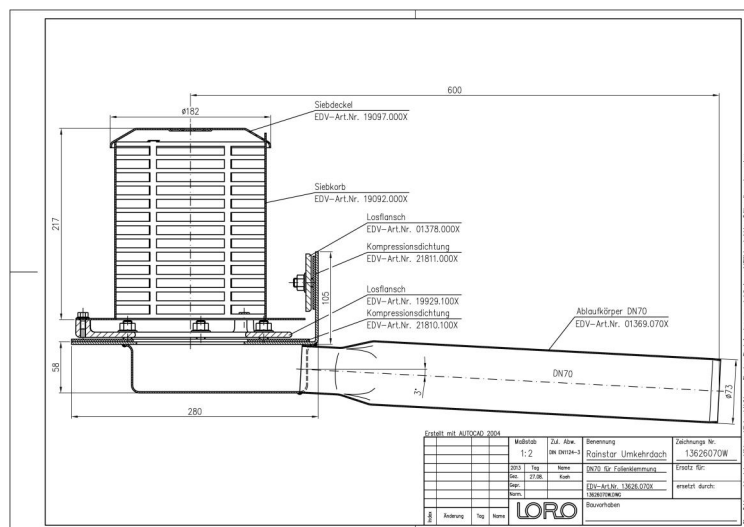


## LORO-ATTIKA-ABL.FREISP.F.UMKEHRD.M.KLEMM

LORO-Attika drain free-standing mirror installation inverted roof with clamping flange for PVC sieve unit 210 mm DN 70

### Описание

LORO - RAINSTAR parapet drain for inverted roof, for gravity flow, according to DIN EN 1253, with 90 clamping flange, as loose and fixed flange construction, for plastic roofing sheets, made of stainless steel and strainer unit for inverted roof, for installation height 210 mm, consisting of strainer basket and strainer cover, made of stainless steel, DN70

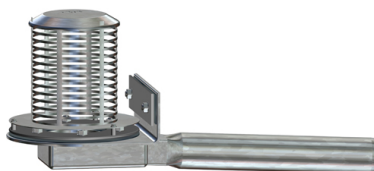

### Данни за артикула

|                          |                    |
|--------------------------|--------------------|
| ЕАН код                  | 4038088093917      |
| ЕТИМ клас                | EC011350           |
| Номинален диаметър       | DN 70              |
| Външни размери (ВxШxД)   | 270 x 737 x 334 mm |
| Тегло                    | 6,50 Kg (STK)      |
| Продуктова група         | 9                  |
| Митнически тарифен номер | 73072980           |
| Материал / Цвят          | Edelstahl, Silber  |

### Забележка за употреба

LORO-X Serie 89 Attikaentwässerung mit hohem Siebkorb - und zusätzlich höhenvariablem Wehr bei der Notentwässerung eignet sich insbesondere für Umkehrdächer. Die unter der Wärmedämmung liegende Abdichtungsbahn wird in den unten angeordneten Ablaufkörper eingeklemmt. Die Höhe des Siebkorb - und bei der Notentwässerung die Höhe des höhenvariablen Wehres - richtet sich nach der Höhe der Wärmedämmung und der darüber liegenden Bekiesung.

### Изтегляния



Alles online

[Инструкция за монтаж \(PDF\)](#)  
[Сертификат \(PDF\)](#)  
[BIM 3D \(STEP\)](#)

[CAD чертеж \(PDF\)](#)  
[CAD 2D \(DXF\)](#)  
[BIM 3D \(IFC\)](#)

[Брошура \(PDF\)](#)  
[CAD 3D \(DWG\)](#)