

## LORO-ATTIKA-ABL.FREISP.F.UMKEHRD.M.KLEMM

LORO-Attika drain free-standing mirror installation inverted roof with clamping flange for PVC sieve unit 495 mm DN 70

### Opis

LORO - RAINSTAR parapet drain for inverted roof, for gravity flow, according to DIN EN 1253, with 90 clamping flange, as loose and fixed flange construction, for plastic roofing sheets, made of stainless steel and strainer unit for inverted roof, for installation height 495 mm, consisting of strainer basket and strainer cover, made of stainless steel, DN70




### Podaci o artiklu

|                       |                    |
|-----------------------|--------------------|
| EAN kod               | 4038088093931      |
| ETIM klasa            | EC011350           |
| Nazivni promjer       | DN 70              |
| Vanjske mjere (VxŠxD) | 270 x 737 x 334 mm |
| Težina                | 7,10 Kg (STK)      |
| Grupa proizvoda       | 9                  |
| Carinski tarifni broj | 73072980           |
| Materijal / Boja      | Edelstahl, Silber  |

### Napomena za upotrebu

LORO-X Serie 89 Attikaentwässerung mit hohem Siebkorb - und zusätzlich höhenvariablem Wehr bei der Notentwässerung eignet sich insbesondere für Umkehrdächer. Die unter der Wärmedämmung liegende Abdichtungsbahn wird in den unten angeordneten Ablaufkörper eingeklemmt. Die Höhe des Siebkorb - und bei der Notentwässerung die Höhe des höhenvariablen Wehres - richtet sich nach der Höhe der Wärmedämmung und der darüber liegenden Bekiesung.

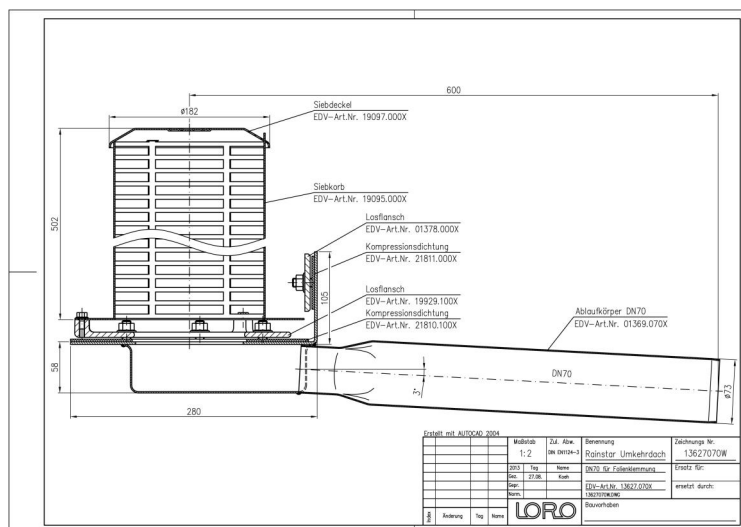

### Preuzimanja



Alles online

[Upute za ugradnju \(PDF\)](#)

[Certifikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Dimenzijski crtež \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Prospekt \(PDF\)](#)

[CAD 3D \(DWG\)](#)