LX-RETENTIONSEINH.F.DL.SR.84,NOT.

Specify LORO-X flange unit for DRAINLET emergency drainage with variable weir and DN125 strainer unit Height

Voce di capitolato

LORO-X VARIOFIT flow aid, strainer basket 210 mm, building-related design please indicate desired weir height when ordering, for emergency drainage with gravity flow, variable weir height, to fit DRAINLET flat roof drain, series 84(DL), DN125



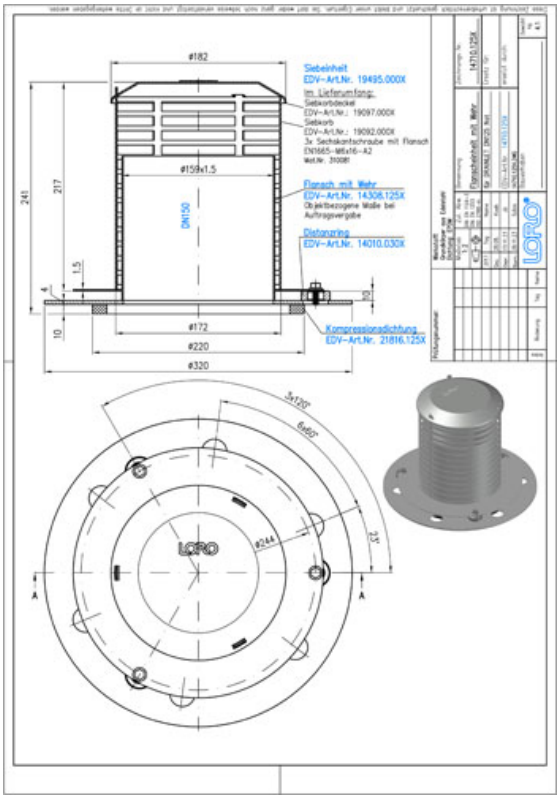

Dati articolo

Codice EAN	4038088101230
Classe ETIM	EC010827
Diametro nominale	DN 125
Misure esterne (AxLxP)	236 x 320 x 320 mm
Peso	4,10 Kg (STK)
Gruppo prodotti	9
Numero tariffa doganale	73072980
Materiale / Colore	Edelstahl, Silber

Note d'uso

LORO bietet für Hauptentwässerung mit Retention und Notentwässerung mit höhenvariablem Wehr aufeinander abgestimmte VARIOFIT Strömungshilfen, die objektbezogen berechnet und gefertigt werden. Die Höhe des Anstauelementes der Notentwässerung wird objektbezogen an die Retentionswasserhöhe der Hauptentwässerung mit Retention angepasst. Die aufgeführten Strömungshilfen passen auf die Grundkörper der angegebenen Serien der Flachdachentwässerung.

Download

Alles online

Disegno dimensionale (PDF)
Aufbauschema (PDF)
BIM 3D (STEP)
Brochure (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Certificato (PDF)
CAD 3D (DWG)