
LORO-X BALKONENTW.-EINH.300 MM,M.HOEHENV

LORO-X balcony drainage unit 300 mm with height adjustment DN 70/50

Texto de licitación

LORO-X balcony drainage unit, series BE with supporting edge, one-piece, without thermal insulation, lateral outlet 3 degrees, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of: drain unit with drain pot DN50 with clamping ring (clamping ring width 35 mm circumferential), sealing element, holding fixture for strainer 100 x 100 mm (for installation height 35 - 140 mm), stainless steel strainer, DN70



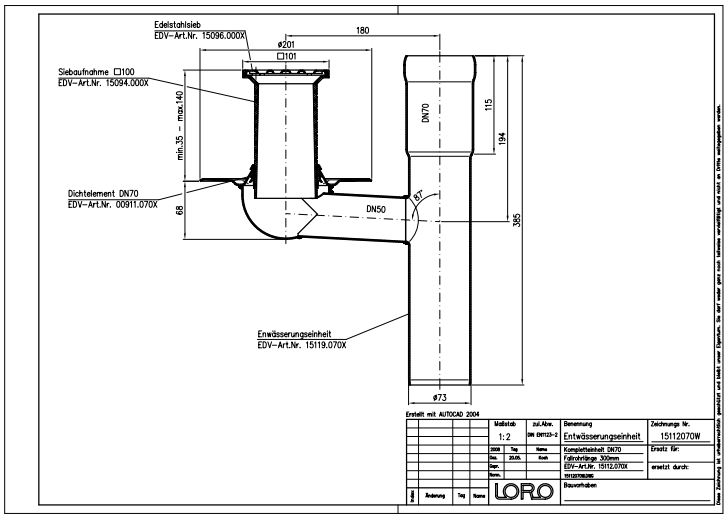

Datos del artículo

Código EAN	**4038088054673**
Clase ETIM	**EC004949**
Diámetro nominal	**DN 70, DN 50**
Longitud/grado nominal	**300**
Medidas exteriores (AxAxL)	**201 x 323 x 385 mm**
Peso	**2,20 Kg (STK)**
Grupo de productos	**4**
Número de arancel aduanero	**73089098**
Material / Color	**Stahl feuerverzinkt, Silber**

Nota de uso

Serie BE beinhaltet Einzelabläufe mit Stützrand aus Stahl mit Endsieb und angeschlossenem Fallrohr mit Langmuffe zum Anschluss der Fallleitung zwischen den Balkongeschossen. Balkonentwässerungseinheiten Serie BE (bestehend aus Fallrohrteil und Ablauf) und Balkonentwässerungsabzweige besitzen Langmuffen zum Toleranzausgleich von +/- 30 mm. Einsatzgebiete Balkone ohne Abdichtungsbahnen mit Gussasphalt, Fertigestrich oder Fliesenbelag im Mörtelbett.

Descargas

Alles online

Dibujo dimensional (PDF)
Aufbauschema (PDF)
CAD 2D (DXF)
Folleto (PDF)
Ficha técnica del sistema LX 931
CAD (DWG)
Certificado (PDF)
Ficha técnica del sistema LX 929