

LORO-X BALKONE-GRUNDEINH. 300 MM

LORO-X balcony basic unit 300 mm

Beskrivning

LORO-balcony drainage unit, according to DIN EN 1253, with raised quality standard, made of steel, hot-dip galvanized, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, downpipe length 300 mm, with drain pot DN50 with clamping ring (clamping ring width 35 mm circumferential), as single part without accessories, DN50




Artikeldata

EAN-kod	4038088054727
ETIM-klass	EC011398
Nominell diameter	DN 50
Nominell längd/grad	300
Yttermått (HxBxL)	201 x 312 x 368 mm
Vikt	1,60 Kg (STK)
Produktgrupp	4
Tullnummer	73089098
Material / Färg	Stahl feuerverzinkt, Silber

Användningsanvisning

Serie BE beinhaltet Einzelabläufe mit Stützrand aus Stahl mit Endsieb und angeschlossenen Fallrohr mit Langmuffe zum Anschluss der Falleitung zwischen den Balkongeschossen. Balkontwässerungseinheiten Serie BE (bestehend aus Fallrohrteil und Ablauf) und Balkontwässerungsabzweige besitzen Langmuffen zum Toleranzausgleich von +/- 30 mm. Einsatzgebiete Balkone ohne Abdichtungsbahnen mit Gussasphalt, Fertigestrich oder Fliesenbelag im Mörtelbett.

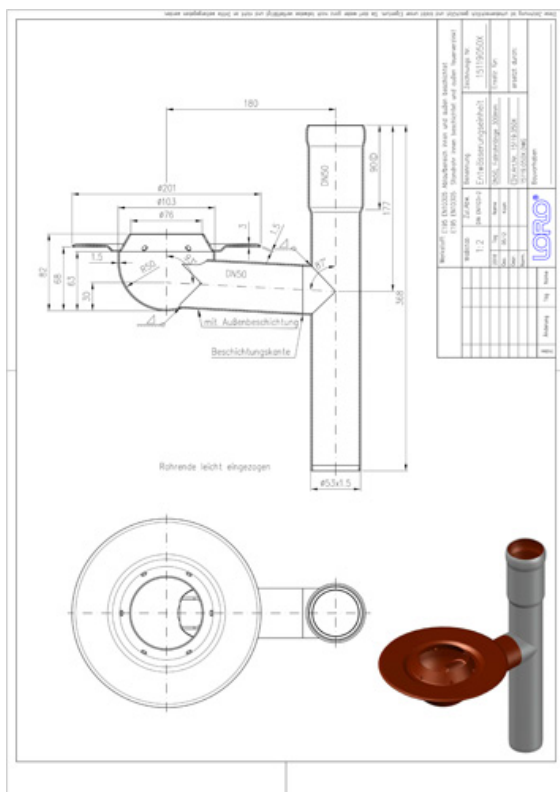

Nedladdningar



Alles online

[Måttitning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Broschyr \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Godkännande \(PDF\)](#)

[BIM 3D \(STEP\)](#)