


LORO-X BALKONE-GRUNDEINH. 300 MM

LORO-X balcony basic unit 300 mm

Opis

LORO-balcony drainage unit, according to DIN EN 1253, with raised quality standard, made of steel, hot-dip galvanized, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, downpipe length 300 mm, with drain pot DN50 with clamping ring (clamping ring width 35 mm circumferential), as single part without accessories, DN50

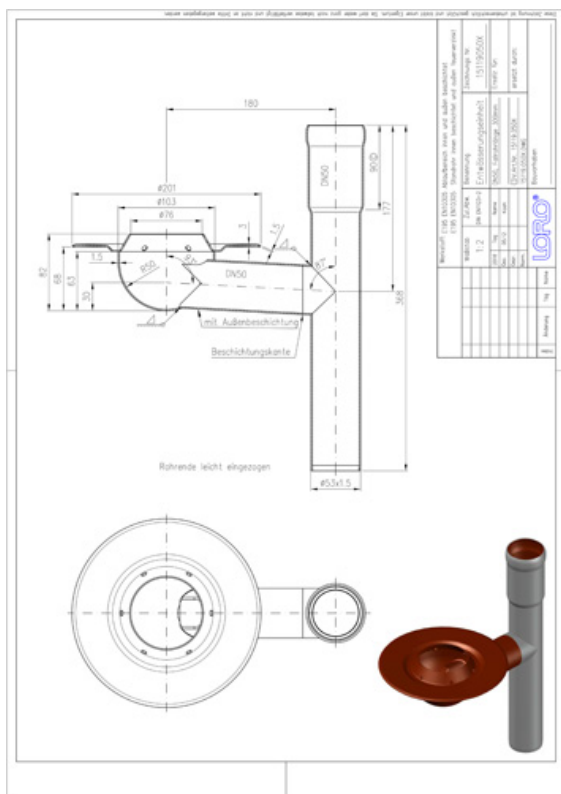

Podaci o artiklu

EAN kod	4038088054727
ETIM klasa	EC011398
Nazivni promjer	DN 50
Nazivna duljina/stupanj	300
Vanjske mjere (VxŠxD)	201 x 312 x 368 mm
Težina	1,60 Kg (STK)
Grupa proizvoda	4
Carinski tarifni broj	73089098
Materijal / Boja	Stahl feuerverzinkt, Silber

Napomena za upotrebu

Serie BE beinhaltet Einzelabläufe mit Stützrand aus Stahl mit Endsieb und angeschlossenem Fallrohr mit Langmuffe zum Anschluss der Fallleitung zwischen den Balkongeschossen. Balkonentwässerungseinheiten Serie BE (bestehend aus Fallrohrteil und Ablauf) und Balkonentwässerungsabzweige besitzen Langmuffen zum Toleranzausgleich von +/- 30 mm. Einsatzgebiete Balkone ohne Abdichtungsbahnen mit Gussasphalt, Fertigestrich oder Fliesenbelag im Mörtelbett.

Preuzimanja



Alles online

[Dimenzijski crtež \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Prospekt \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Certifikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)