

LORO-X BALKONABL.F.BRANDSCHUTZ,SENKR.2TL

LORO-X balcony drain for fire protection vertical two-piece with height adjustment series F DN 70

Texte de prescription

LORO-X balcony drain, fire protection system, series F, general building authority test certificate no. P-MPA-E-09-010, two-piece, with thermal insulation, vertical outlet, with pre-fitted connecting collar made of bitumen/EPDM composite, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of drain pot, connecting collar, clamping ring, sealing element, extension cartridge (for installation height 40 - 120 mm), connecting collar, clamping ring, drainage ring, holding fixture for strainer 100 x 100 mm (for installation height 35 - 150 mm), stainless steel strainer, DN70



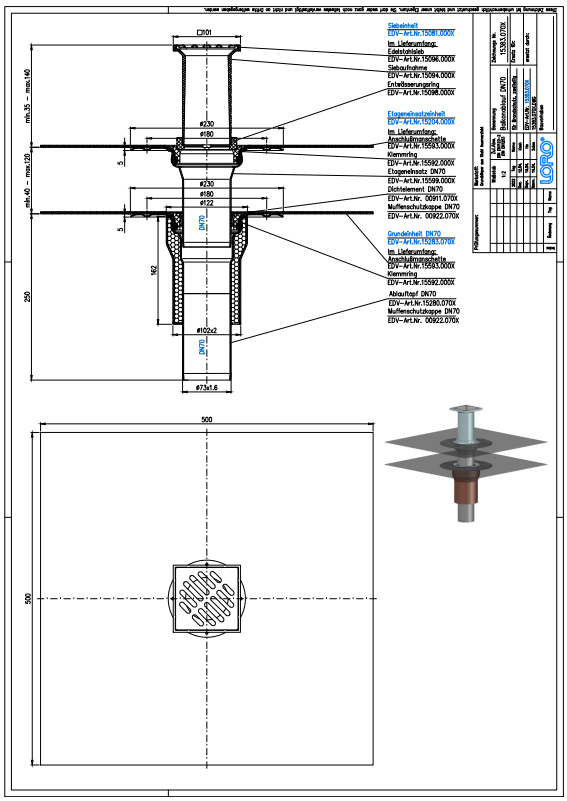

Données de l'article

Code EAN	**4038088096307**
Classe ETIM	**EC011398**
Diamètre nominal	**DN 70**
Poids	**5,60 Kg (STK)**
Groupe de produits	**4**
Numéro tarifaire douanier	**73089098**
Matériau / Couleur	**Stahl feuerverzinkt, Silber**

Note d'utilisation

Die Serien E und F beinhalten Balkonabläufe als Einzelabläufe mit Anschlussmanschette. Serie F beinhaltet Einzelabläufe mit Anschlussmanschette mit höhenverstellbarer Siebaufnahme und Endsieb aus Edelstahl.

Téléchargements

Alles online

Notice d'installation (PDF)
CAD 3D (DWG)
Dessin dimensionnel (PDF)
BIM 3D (STEP)
CAD 2D (DXF)
BIM 3D (IFC)