


LORO-X BALKONABL.3GR.1TLG.O.WD.DN 50

LORO-X balcony drain 3 degrees one-piece without insulation DN50 with height adjustment VS-connection collar

Description

LORO-X balcony drain, series FF, one-piece, without thermal insulation, lateral outlet 3 degrees, with pre-fitted VS connecting collar made of multi-layer composite material, for sealing with composite sealants, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of drain pot, VS connecting collar, sealing element, holding fixture for strainer 100 x 100 mm (for installation height 15 - 130 mm), stainless steel strainer, DN50

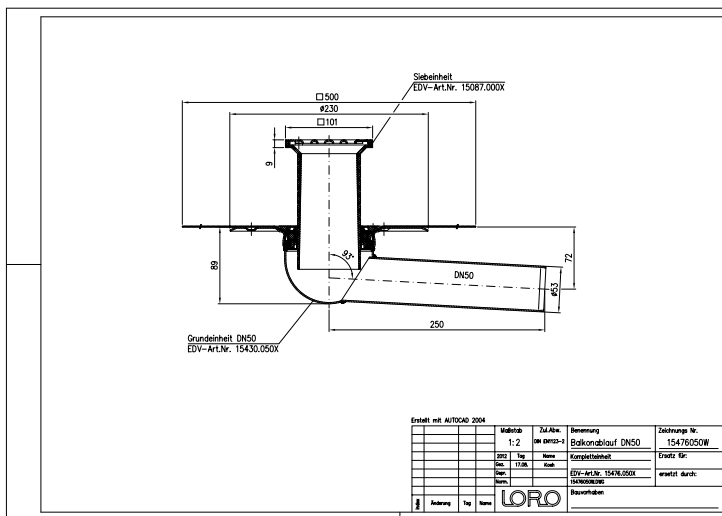

Article information

EAN Code	4038088061398
ETIM Class	EC004949
Nominal diameter	DN 50
Outside measurements (HxWxL)	500 x 501 x 199 mm
Weight	1,50 Kg (STK)
Product group	4
Customs tariff number	73089098
Material / Color	Stahl feuerverzinkt, Silber

Usage note

Die Serie FF beinhaltet Balkonabläufe als Einzelabläufe mit VS-Anschlussmanschette aus Mehrlagenverbundwerkstoff mit Verbundabdichtungen. Die Serie FF ist weist eine höhenverstellbare Siebaufnahme mit Edelstahlsieb auf. Einsatzgebiet Balkone mit Verbundabdichtungen.

Downloads



Alles online

[Installation \(PDF\)](#)

[Certificate \(PDF\)](#)

CAD 2D (DXF)

[CAD drawing \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

CAD (DWG)

[Brochure \(PDF\)](#)

System data sheet LX 974