LORO-X BALKONABL.3GR.1TLG.O.WD.DN 50

LORO-X balcony drain 3 degrees one-piece without insulation DN50 with height adjustment VS-connection collar

Beskrivelse

LORO-X balcony drain, series FF, one-piece, without thermal insulation, lateral outlet 3 degrees, with pre-fitted VS connecting collar made of multi-layer composite material, for sealing with composite sealants, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of drain pot, VS connecting collar, sealing element, holding fixture for strainer 100 x 100 mm (for installation height 15 - 130 mm), stainless steel strainer, DN50

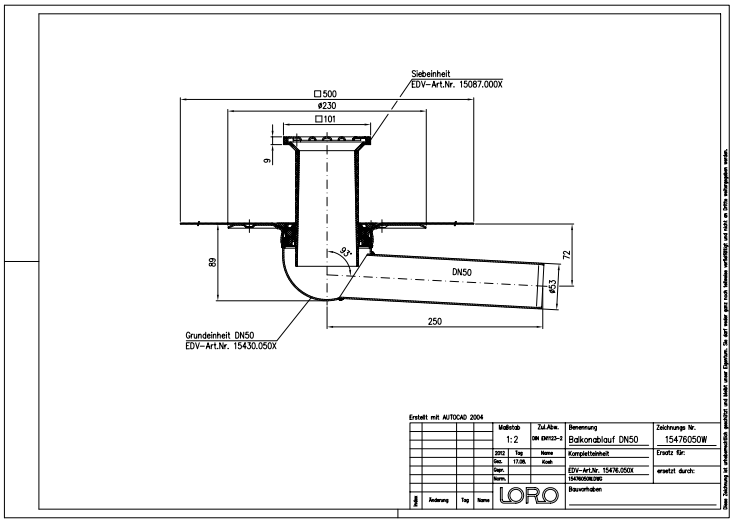

Artikeldata

EAN-kode	**4038088061398**
ETIM Klasse	**EC004949**
Nominel diameter	**DN 50**
Ydermål (HxBxL)	**500 x 501 x 199 mm**
Vægt	**1,50 Kg (STK)**
Produktgruppe	**4**
Toldtarifnummer	**73089098**
Materiale / Farve	**Stahl feuerverzinkt, Silber**

Brugsanvisning

Die Serie FF beinhaltet Balkonabläufe als Einzelabläufe mit VS-Anschlussmanschette aus Mehrlagenverbundwerkstoff mit Verbundabdichtungen.Die Serie FF ist weist eine höhenverstellbare Siebaufnahme mit Edelstahlsieb auf.Einsatzgebiet Balkone mit Verbundabdichtungen.

Downloads

Alles online

- Installationsvejledning (PDF)
- Certifikat (PDF)
- CAD 2D (DXF)
- Måltegning (PDF)
- Aufbauschema (PDF)
- CAD (DWG)
- Brochure (PDF)
- Systemdatablad LX 974