LORO-X BALCONY DRAINS, SERIES F, TWO-PART UNIT, HORIZONTAL SOCKET, WITHOUT THERMAL INSULATION DN 70

LORO-X balcony drain 3 degrees two-piece without insulation with height adjustment DN 70

Opis

LORO-X balcony drain, series F, two-piece, without thermal insulation, lateral outlet 3 degrees, with pre-fitted connecting collar made of bitumen/EPDM composite, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of drain pot, connecting collar, clamping ring, sealing element, extension cartridge (for installation height 40 - 120 mm), connecting collar, clamping ring, drainage ring, holding fixture for strainer 100 x 100 mm (for installation height 35 - 150 mm), stainless steel strainer, DN70

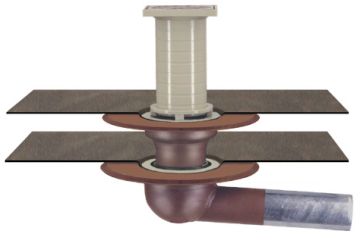

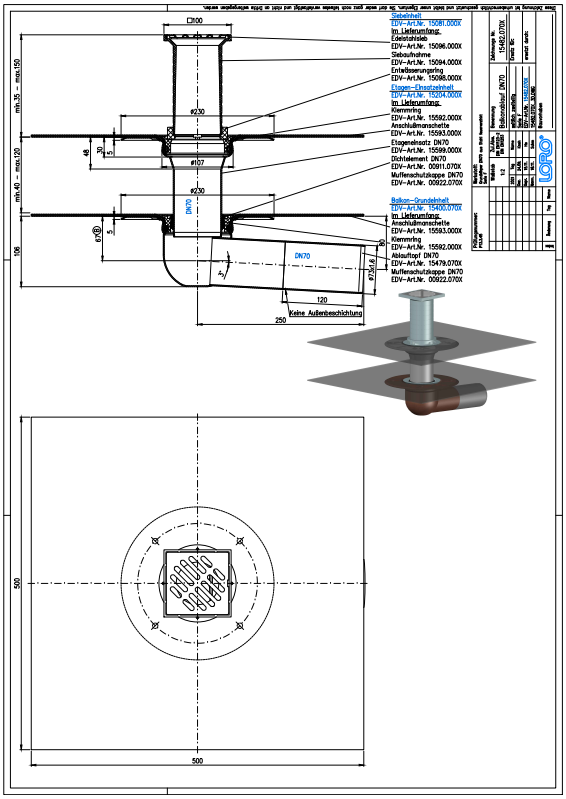

Podatki o izdelku

EAN koda	4038088008270
ETIM razred	EC004949
Nazivni premer	DN 70
Zunanje mere (VxŠxD)	230 x 367 x 370 mm
Teža	4,60 Kg (STK)
Skupina izdelkov	4
Carinska tarifna številka	73089098
Material / Barva	Stahl feuerverzinkt, Silber

Opomba za uporabo

Die Serien E und F beinhalten Balkonabläufe als Einzelabläufe mit Anschlussmanschette. Serie F beinhaltet Einzelabläufe mit Anschlussmanschette mit höhenverstellbarer Siebaufnahme und Endsieb aus Edelstahl.. Im Standard werden die Serien E und F aus feuerverzinktem Stahl mit zusätzlicher Beschichtung gefertigt. Auf Anfrage ist auch die Fertigung aus massivem Kupfer möglich.Einsatzgebiete Balkone mit Abdichtungsbahnen, Fliesen- oder Plattenbelag.

Prenosi

Alles online

Navodila za vgradnjo (PDF)
Certifikat (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Merska risba (PDF)
Aufbauschema (PDF)
CAD 3D (DWG)
Prospekt (PDF)
Podatkovni list sistema LX 968
BIM 3D (STEP)