

LORO-X BALCONY DRAINS, SERIES E+F, BASE UNIT, HORIZONTAL SOCKET, WITH THERMALINSULATION DN 50

LORO-X balcony basic unit 3 degrees with insulation DN 50

Opis

LORO balcony drain base unit with connecting collar made of bitumen/EPDM composite, series E and F, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, long-life outside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, outlet 3 degrees, with thermal insulation, consisting of thermally insulated drain pot, connecting collar and clamping ring, DN50




Dane artykułu

Kod EAN	4038088008294
Klasa ETIM	EC004949
Średnica nominalna	DN 50
Wymiary zewnętrzne (WxSxD)	230 x 366 x 119 mm
Waga	2,30 Kg (STK)
Grupa produktów	4
Numer taryfy celnej	73089098
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

kein Verwendungshinweis notwendig

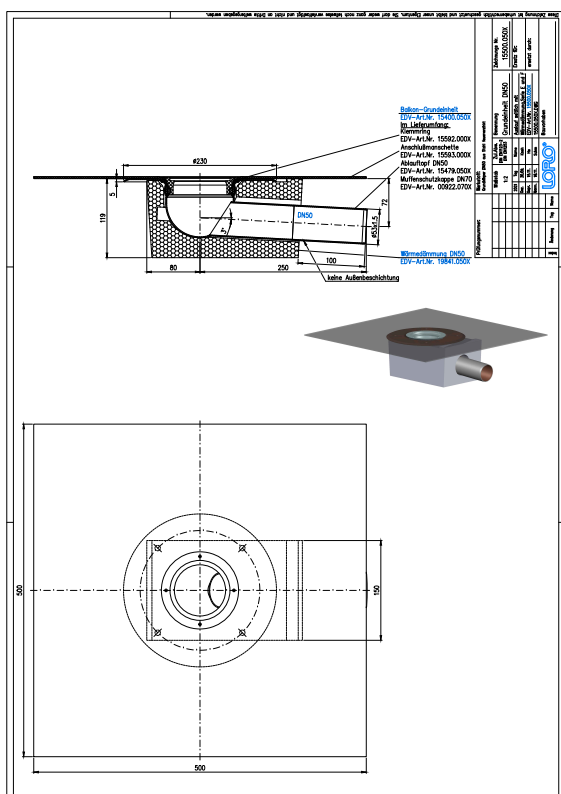

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[Certyfikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Rysunek wymiarowy \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Broszura \(PDF\)](#)

[CAD 3D \(DWG\)](#)