


LORO-X FLACHDACHABL.A.STAHL VERZ.,F.FLÜS

LORO-X Galvanised steel flat roof drain for liquid plastic DN 80

Opis

LORO-X flat roof renovation drain, one-piece, without thermal insulation, vertical outlet, for main drainage with gravity flow, discharge rate 5.6 l/s at 35 mm water level on the roof, with bonding flange for liquid plastic, with transition sealing element for pipe internal diameter 98-106 mm, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe, made of steel, hot-dip galvanized, DN 80

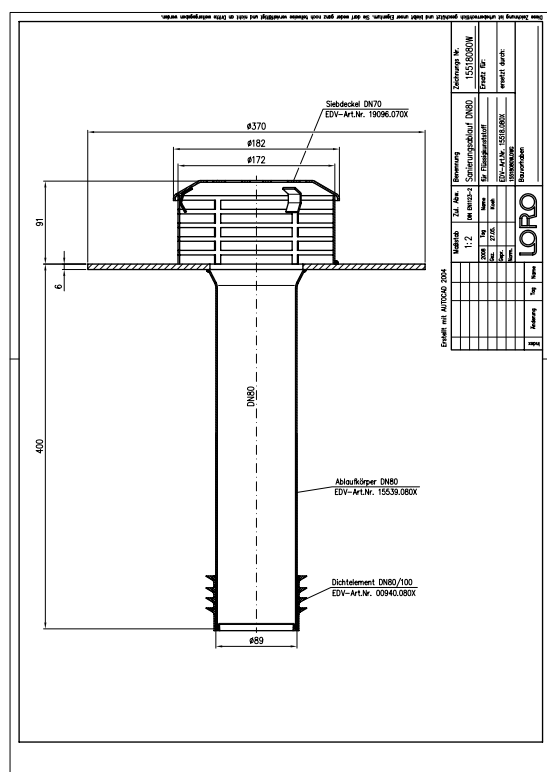

Podatki o izdelku

EAN koda	4038088077955
ETIM razred	EC011398
Nazivni premer	DN 80
Zunanje mere (VxŠxD)	370 x 370 x 494 mm
Teža	7,00 Kg (STK)
Skupina izdelkov	4
Carinska tarifna številka	73089098
Material / Barva	Stahl feuerverzinkt, Silber

Opomba za uporabo

LORO-Flachdach-Sanierungsablauf mit Klebeflansch für Flüssigkunststoff DN 80 mit Übergangsdichtelement für Rohr-Innendurchmesser 98 - 106 mm

Prenosi



Alles online

[Navodila za vgradnjo \(PDF\)](#)

[Certifikat \(PDF\)](#)

[Merska risba \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Prospekt \(PDF\)](#)

[CAD \(DWG\)](#)