LORO-X FLACHDACHABL.A.STAHL VERZ.,F.FLÜS

LORO-X Galvanised steel flat roof drain for liquid plastic DN 80

Opis

LORO-X flat roof renovation drain, one-piece, without thermal insulation, vertical outlet, for main drainage with gravity flow, discharge rate 5.6 l/s at 35 mm water level on the roof, with bonding flange for liquid plastic, with transition sealing element for pipe internal diameter 98-106 mm, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe, made of steel, hot-dip galvanized, DN 80

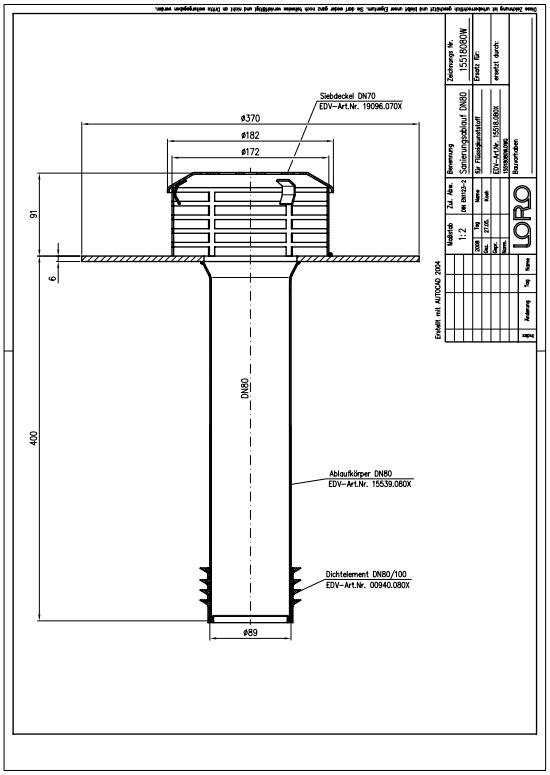

Podaci o artiklu

EAN kod	4038088077955
ETIM klasa	EC011398
Nazivni promjer	DN 80
Vanjske mjere (VxŠxD)	370 x 370 x 494 mm
Težina	7,00 Kg (STK)
Grupa proizvoda	4
Carinski tarifni broj	73089098
Materijal / Boja	Stahl feuerverzinkt, Silber

Napomena za upotrebu

LORO-Flachdach-Sanierungsablauf mit Klebeflansch für Flüssigkunststoff DN 80 mit übergangs-Dichtelement für Rohr-Innendurchmesser 98 - 106 mm

Preuzimanja

Alles online

Upute za ugradnju (PDF)
Certifikat (PDF)
Dimenzijski crtež (PDF)
CAD 2D (DXF)
Prospekt (PDF)
CAD (DWG)