



LORO-X SINGLE DRAIN TYPE A, WITH LATERAL RUN-OFF

LORO-X single outlet with support edge 35 mm

Text pro výběrové řízení

LORO-X balcony drain, series A with supporting edge, one-piece, without thermal insulation, lateral outlet 3 degrees, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of: consisting of drain pot (clamping ring width 35 mm circumferential), sealing element, plastic strainer 82 x 82 mm (for installation height approx. 30 +/- 5 mm), DN70

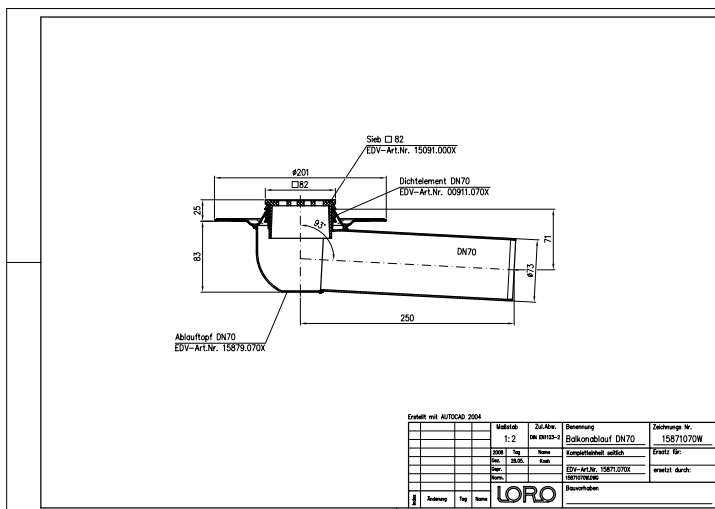

Údaje o artiklu

EAN kód	4038088008751
ETIM třída	EC011398
Jmenovitý průměr	DN 70
Hmotnost	1,60 Kg (STK)
Skupina produktů	4
Celní sazebník	73089098
Materiál / Barva	Stahl feuerverzinkt, Silber

Pokyny k použití

Serie A beinhaltet Einzelabläufe mit Stützrand aus Stahl mit Endsieb. Beide Serien weisen Öffnungen für Sickerwasser oberhalb des Stützrandes auf, sodass Restwasserbildung vermieden wird. Einsatzgebiete Balkone ohne Abdichtungsbahnen mit Gussasphalt, Fertigestrich oder Fliesenbelag im Mörtelbett.

Ke stažení



Alles online

[Výkres rozměrů \(PDF\)](#)

CAD (DWG)

[Prospekt \(PDF\)](#)

CAD 2D (DXF)