

LORO-DL MINI ABLAUF, KLEMMFL. 1-TLG. O. WD.

LORO-DRAINLET Mini drain clamp flange one-piece without insulation for box drain DN 50

Beskrivning

LORO-X DRAINLET-Mini, series 84(DL), one-piece, vertical outlet, for main drainage with gravity flow, discharge rate 2.7 l/s at 35 mm water level on the roof, with clamping flange as loose and fixed flange construction including compression seals, DRAINLET-Mini hood made of stainless steel, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to LX specification sheet LX1391, made of stainless steel, DN50




Artikeldata

EAN-kod	4038088095270
ETIM-klass	EC011398
Nominell diameter	DN 50
Yttermått (HxBxL)	199 x 175 x 175 mm
Vikt	1,20 Kg (STK)
Produktgrupp	4
Tullnummer	73072980
Material / Färg	Edelstahl, Silber

Användningsanvisning

Der LORO-X DRAINLET Mini zeichnet sich durch platzsparende Maße (145 mm Flanschdurchmesser) aus und eignet sich daher z.B. für Kastenrinnen, Carports und kleine Dachflächen. Einsatzgebiete: Kastenrinnen ab 150 mm Breite, Gesimsrinnen, Garagen, Carports, Fertiggaragen, Vordächer, kleine Dachflächen.

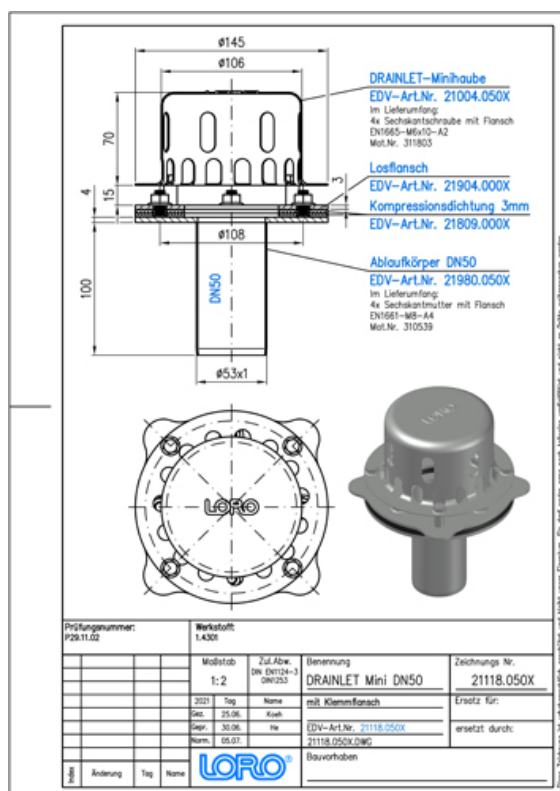

Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkännande \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Måttitning \(PDF\)](#)

Systemdatablad LX 1391

CAD 3D (DWG)

[Broschyr \(PDF\)](#)

Systemdatablad LX 1641

BIM 3D (STEP)