


LORO-DJ HPT-ABL.M.FLACHER HAUBE,EDELST.

LORO-DRAINJET with flat cover stainless steel with clamping flange one-piece with insulation, DN 70

Opis

LORO-X DRAINLET flat roof siphonic drain, series 49(DJ), one-piece, with thermal insulation, vertical outlet, for main drainage with siphonic flow, discharge rate 12.0 l/s at 35 mm water level on the roof, with clamping flange as loose and fixed flange construction including compression seals, for bituminous and plastic roofing sheets, DRAINJET hood plate version made of stainless steel, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to LX data sheet LX2119, made of stainless steel, DN70

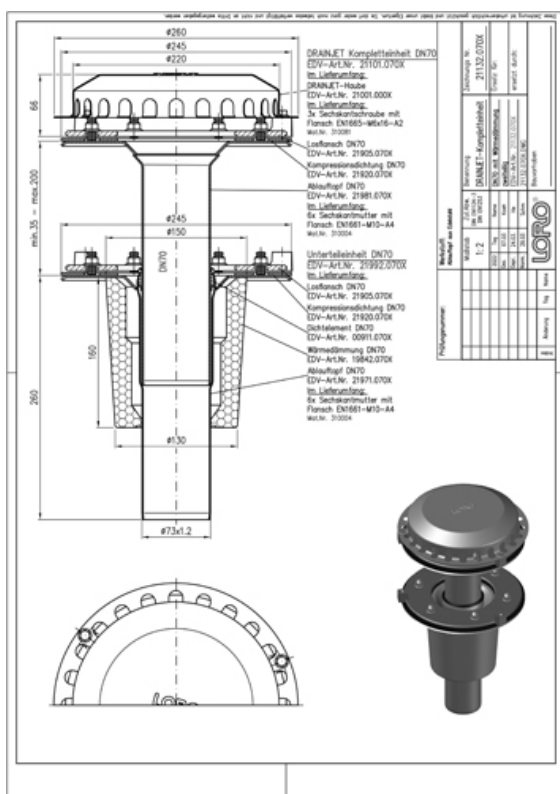

Podaci o artiklu

EAN kod	4038088106587
ETIM klasa	EC011398
Nazivni promjer	DN 70
Vanjske mjere (VxŠxD)	260 x 260 x 530 mm
Težina	4,70 Kg (STK)
Grupa proizvoda	4
Carinski tarifni broj	73072980
Materijal / Boja	Edelstahl, Silber

Napomena za upotrebu

Große Dachflächen können durch leistungsstarke Systeme mit Druckströmung wirtschaftlich und sicher entwässert werden. LORO-X Schnellablaufsysteme mit Druckströmung werden durch die höhere Strömungsgeschwindigkeit mit kleineren Rohrdurchmessern bei gleichzeitig höherer Abflussleistung betrieben. Die hohe Strömungsgeschwindigkeit im Rohr erhöht darüber hinaus den Selbstreinigungseffekt. Einsatzgebiete Industriedächer, Gewerbe, Warmdächer, Kaldächer, Kastenrinnen, Tiefpunktlinien, Schnellablaufsysteme, große Dachflächen, Stadien, Lagerhallen, Logistikzentren.

Preuzimanja



Alles online

[Dimenzijski crtež \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Certifikat \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Tehnički list sustava LX 2119](#)

[BIM 3D \(STEP\)](#)