


LORO-DJ EMERGENCY DRAIN SIPHONIC FLOW VERTICAL DN 125 1-PART. CLAMMING FLANGE,

LORO-DRAINJET stainless steel emergency drain with clamping flange, one-piece, without insulation, with large cover DN 125

Descriere

LORO-X DRAINLET flat roof siphonic drain, series 49(DJ), high performance, one-piece, without thermal insulation, vertical outlet, for emergency drainage with siphonic flow, discharge rate 92.0 l/s at 75 mm water level on the roof, with clamping flange as loose and fixed flange construction, for bituminous and plastic roofing sheets, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to LX data sheet LX947, made of stainless steel, DN125

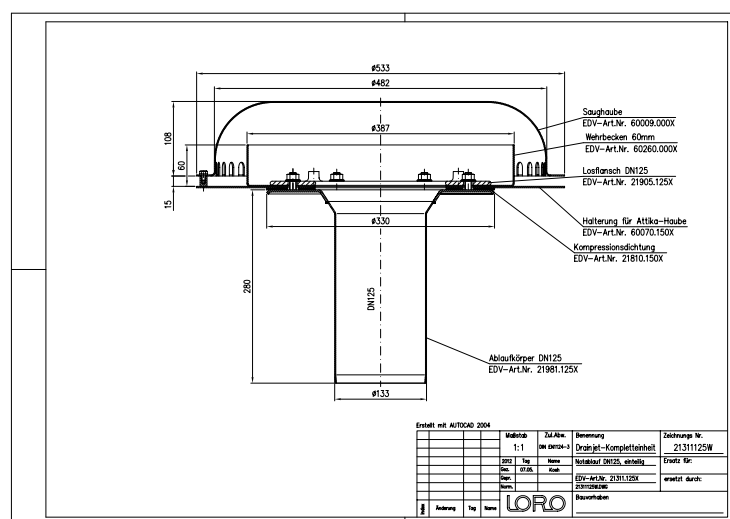

Date articol

Cod EAN 4038088089446

Clasă ETIM EC010827

Diametru nominal DN 125

Dimensiuni exterioare (ÎxLxA) 533 x 533 x 408 mm

Greutate 12,10 Kg (STK)

Grupă de produse 4

Număr tarif vamal 73072980

Material / Culoare Edelstahl, Silber

Notă de utilizare

Große Dachflächen können durch leistungsstarke Systeme mit Druckströmung wirtschaftlich und sicher entwässert werden. LORO-X Schnellablaufsysteme mit Druckströmung werden durch die höhere Strömungsgeschwindigkeit mit kleineren Rohrdurchmessern bei gleichzeitig höherer Abflussleistung betrieben. Die hohe Strömungsgeschwindigkeit im Rohr erhöht darüber hinaus den Selbstreinigungseffekt. Einsatzgebiete Industriedächer, Gewerbe, Warmdächer, Kaltdächer, Kastenrinnen, Tiefpunktlinien, Schnellablaufsysteme, große Dachflächen, Stadien, Lagerhallen, Logistikzentren.

Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)

[Certificat \(PDF\)](#)

[CAD \(DWG\)](#)

[Desen CAD \(PDF\)](#)

[Fișă tehnică de sistem LX 947](#)

[Broșură \(PDF\)](#)

[CAD 2D \(DXF\)](#)