
LORO-DL SANIERUNGS ABL.EDELST.DN 80

LORO-DRAINLET stainless steel renovation drain DN 80

Κείμενο προδιαγραφών

LORO-X DRAINLET flat roof renovation drain, series 84(DL), one-piece, without thermal insulation, vertical outlet, for main drainage with gravity flow, discharge rate 3.1 l/s at 35 mm water level on the roof, with clamping flange as loose and fixed flange construction including compression seals, for bituminous and plastic roofing sheets, with transition sealing element for pipe inside diameter 98-106 mm, according to DIN EN 1253 with raised quality standard, proof of performance according to LX data sheet LX2308, made of stainless steel, DN 80



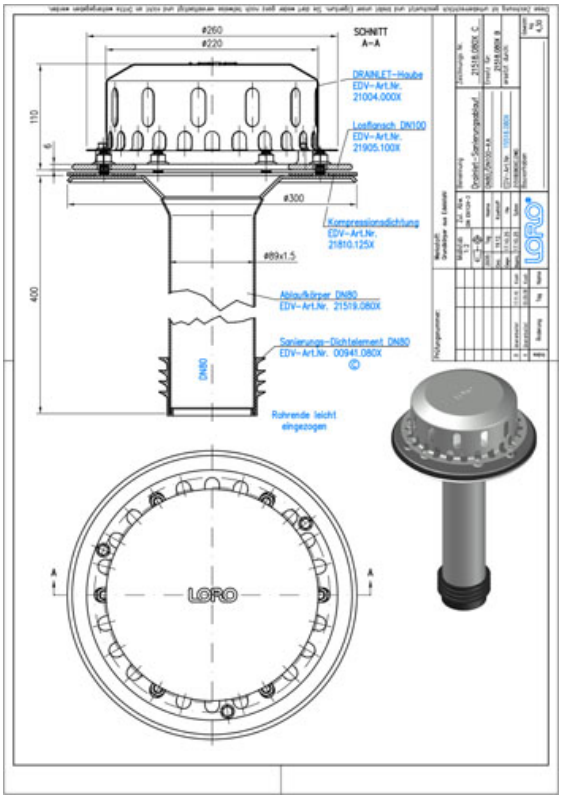

Στοιχεία προϊόντος

Κωδικός EAN	**4038088075814**
Κατηγορία ETIM	**EC011398**
Ονομαστική διάμετρος	**DN 80**
Εξωτερικές διαστάσεις (ΥxΠxΜ)	**300 x 300 x 300 mm**
Βάρος	**4,30 Kg (STK)**
Ομάδα προϊόντων	**4**
Δασμολογικός αριθμός	**73072980**
Υλικό / Χρώμα	**Edelstahl, Silber**

Σημείωση χρήσης

LORO-Flachdach-Sanierungsablauf mit Klebeflansch für Flüssigkunststoff DN 80 mit übergangs-Dichtelement für Rohr-Innendurchmesser 98 - 106 mm

Λήψεις

Alles online

Οδηγίες εγκατάστασης (PDF)
Έγκριση (PDF)
BIM 3D (STEP)
Σχέδιο διαστάσεων (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Φυλλάδιο (PDF)
CAD 3D (DWG)