


LORO-DL SANIERUNGS ABL.EDELST.DN 80

LORO-DRAINLET stainless steel renovation drain DN 80

Περιγραφή

LORO-X DRAINLET flat roof renovation drain, series 84(DL), one-piece, without thermal insulation, vertical outlet, for main drainage with gravity flow, discharge rate 5.6 l/s at 35 mm water level on the roof, with clamping flange as loose and fixed flange construction including compression seals, for bituminous and plastic roofing sheets, with transition sealing element for pipe inside diameter 98-106 mm, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe, made of stainless steel, DN 80

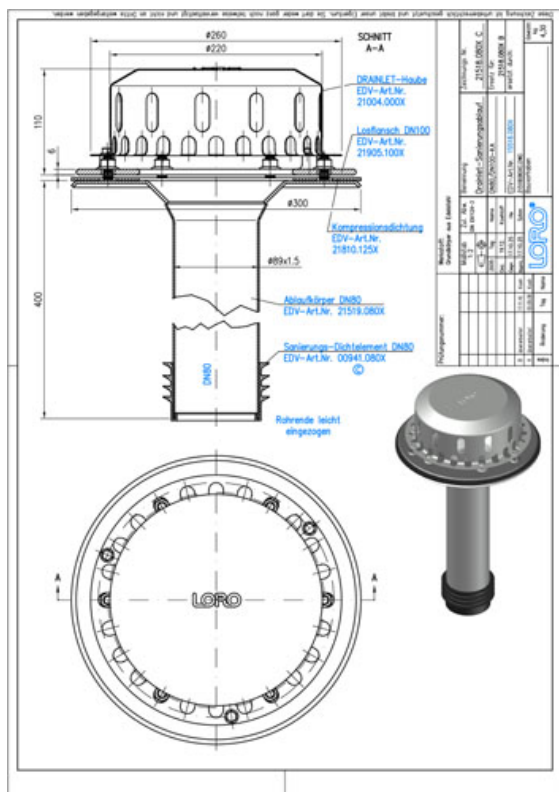

Στοιχεία προϊόντος

Κωδικός EAN 4038088075814

Κατηγορία ETIM EC011398

Ονομαστική διάμετρος DN 80

Εξωτερικές διαστάσεις (ΥxΠxΜ) 300 x 300 x 300 mm

Βάρος 4,30 Kg (STK)

Ομάδα προϊόντων 4

Δασμολογικός αριθμός 73072980

Υλικό / Χρώμα Edelstahl, Silber

Σημείωση χρήσης

LORO-Flachdach-Sanierungsablauf mit Klebeflansch für Flüssigkunststoff DN 80 mit Übergangs-Dichtelement für Rohr-Innendurchmesser 98 - 106 mm

Λήψεις



Alles online

[Οδηγίες εγκατάστασης \(PDF\)](#)

[Έγκριση \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Σχέδιο διαστάσεων \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Φυλλάδιο \(PDF\)](#)

[CAD 3D \(DWG\)](#)