


LORO-DL HPT.ABL.KLEMMFL.SENKR.1-TLG.O.WD

LORO-DRAINLET main drain clamping flange vertical one-piece without insulation with retention pipe according to specification

Leírás

LORO-X DRAINLET flat roof drain for overload-free main drainage, please contact LOROWERK for the determination of the necessary retention openings for the main drainage and variable-height retention pipe, series 84(DL) one piece without thermal insulation, vertical pipe, for main drainage with gravity flow, discharge rate max. 4.5 l/s with a water height of up to 75 mm on the roof, with clamping flange as loose and fixed flange construction, for bitumen and plastic roofing sheets, DRAINLET hood made of stainless steel, according to DIN EN 1253, proof of performance according to LX-specification sheet LX1871, made of stainless steel, DN100




Cikkadatok

EAN kód	4038088100394
ETIM osztály	EC011398
Névleges átmérő	DN 100
Külső méretek (MxSzxH)	390 x 300 x 300 mm
Súly	4,80 Kg (STK)
Termékcsoport	9
Vámtarifaszám	73072980
Anyag / Szín	Edelstahl, Silber

Használati megjegyzés

kein Verwendungshinweis notwendig

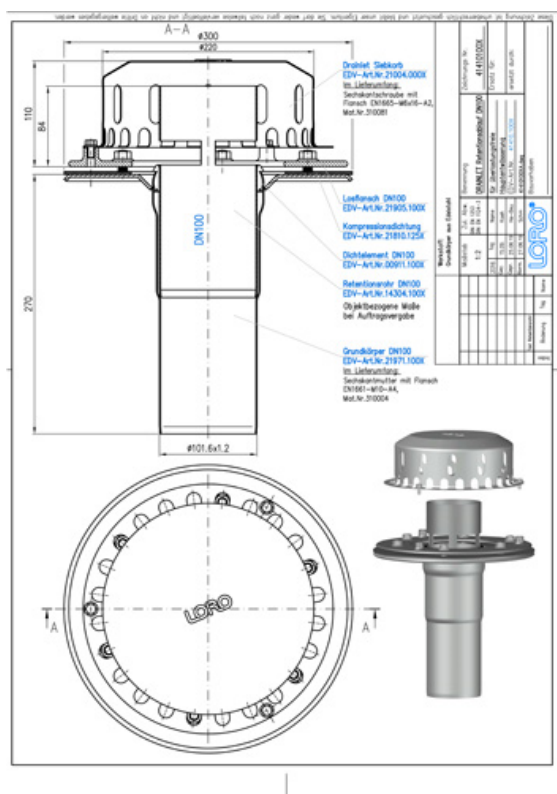

Letöltések



Alles online

[Méretrajz \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Prospektus \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[LX rendszer-adatlap 1871](#)

[BIM 3D \(STEP\)](#)