

LORO-X COMPOSITE PIPE WITH 1 SOCKET 250 MM DN 32

LORO-Composite Pipe 1 socket 250 mm DN 32

Kiírási szöveg

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 250 mm long, DN32




Cikkadatok

EAN kód	4038088067840
ETIM osztály	EC010225
Névleges átmérő	DN 32
Névleges hossz/fok	250
Külső méretek (MxSzxH)	89 x 89 x 275 mm
Súly	1,40 Kg (STK)
Termékcsoport	3
Vámtarifaszám	73063012
Anyag / Szín	Stahl feuerverzinkt, Silber

Használati megjegyzés

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

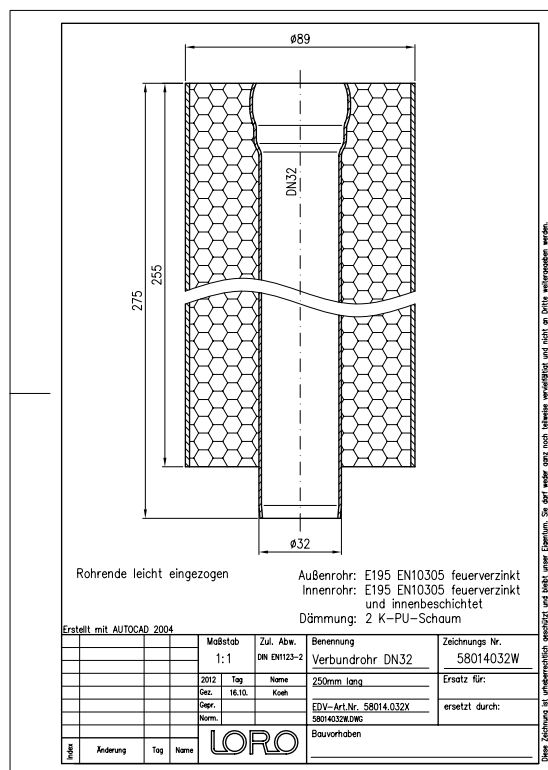

Letöltések



Alles online

[Szerelési útmutató \(PDF\)](#)
[CAD 2D \(DXF\)](#)

[Méterrajz \(PDF\)](#)
[CAD \(DWG\)](#)

[Prospektus \(PDF\)](#)
[BIM IFC4 \(parametrisch\)](#)