

## LORO-X COMPOSITE PIPE WITH 1 SOCKET

1500 MM DN 70

LORO multilayer pipe 1500 mm DN 70

### Descriere

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 1500 mm long, DN70




### Date articol

|                               |                             |
|-------------------------------|-----------------------------|
| Cod EAN                       | 4038088024669               |
| Clasă ETIM                    | EC010225                    |
| Diametru nominal              | DN 70                       |
| Lungime/grad nominal          | 1500                        |
| Dimensiuni exterioare (îxLxA) | 102 x 102 x 1555 mm         |
| Greutate                      | 12,50 Kg (STK)              |
| Grupă de produse              | 3                           |
| Număr tarif vamal             | 73063012                    |
| Material / Culoare            | Stahl feuerverzinkt, Silber |

### Notă de utilizare

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

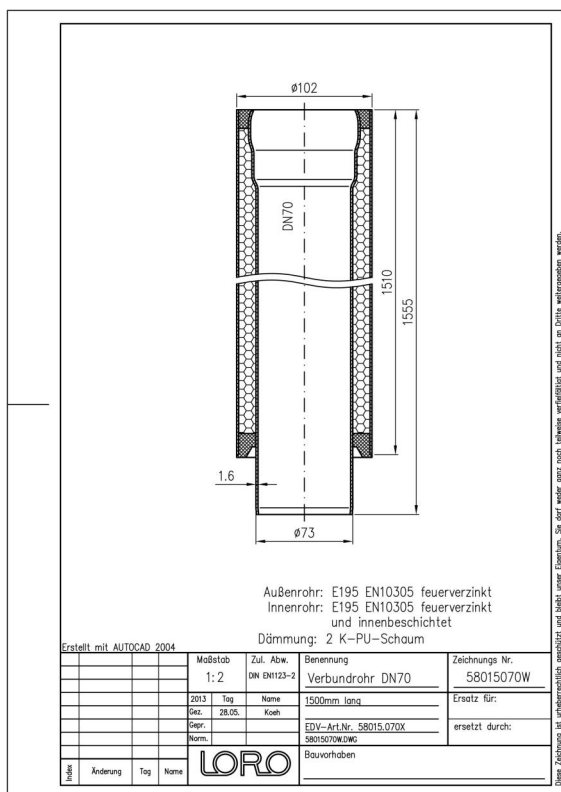

### Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)  
[CAD 2D \(DXF\)](#)

[Desen CAD \(PDF\)](#)  
[CAD \(DWG\)](#)

[Broșură \(PDF\)](#)